

Health Infrastructure NSW
Westmead PSB and MSCP
Construction Noise Monitoring

Noise monitoring report
2022-02-09 to 2022-02-28

AC03

v1 | 7 March 2022

This report takes into account the particular instructions and requirements of our client.

It is not intended for and should not be relied upon by any third party and no responsibility is undertaken to any third party.

Job number 271985




Arup
Arup Pty Ltd ABN 18 000 966 165



Arup
Level 10 201 Kent Street
PO Box 76 Millers Point
Sydney 2000
Australia
www.arup.com

ARUP

Document Verification

Job title		Westmead PSB and MSCP Construction Noise Monitoring		Job number		271985	
Document title		Noise monitoring report 2022-02-09 to 2022-02-28		File reference		v1	
Document ref		AC03					
Revision	Date	Filename	271985-AC03v1 PSB and MSCP Noise monitoring - Feb 2022.pdf				
v1	7 Mar 2022	Description	Issue				
			Prepared by	Checked by	Approved by		
		Name	Cynthia Nguyen	Grant Cuthbert	Glenn Wheatley		
		Signature					
		Filename					
		Description					
			Prepared by	Checked by	Approved by		
		Name					
		Signature					
		Filename					
		Description					
			Prepared by	Checked by	Approved by		
		Name					
		Signature					
		Filename					
		Description					
			Prepared by	Checked by	Approved by		
		Name					
		Signature					

Issue Document Verification with Document



Contents

	Page	
1	Introduction	1
2	Noise logger locations	2
3	Noise Management Levels	3
3.1	Management Level updates	3
4	Noise monitoring results	4
4.1	Excluded monitoring periods	4
4.2	Outages	4
4.3	Exceedances	4
4.4	Daily noise monitoring results	5

Appendices

Appendix A

Baseline Noise Monitoring Daily Results

1 Introduction

Arup has been commissioned by PricewaterhouseCoopers (PwC) on behalf of Health Infrastructure NSW to install noise monitors within the Central Acute Services Building (CASB), Children's Hospital Westmead (CHW) and Kids Research (KR) and Ronald McDonald House (RMH) buildings to monitor construction noise from the Paediatric Service Building (PSB) and Multi Storey Car Park development sites in the Westmead Precinct.

The noise loggers have been setup to send email and SMS notifications to stakeholders when construction Noise Management Levels (NMLs) are exceeded.

This report details noise measurement results from **9 February 2022 to 28 February 2022** inclusive.

2 Noise logger locations

Acoustic Research Labs Ngara noise loggers have been installed in the locations shown in Figure 1 and Figure 2 below.

The noise loggers were calibrated by Acoustic Research Labs (NATA-accredited calibration) in November 2021.

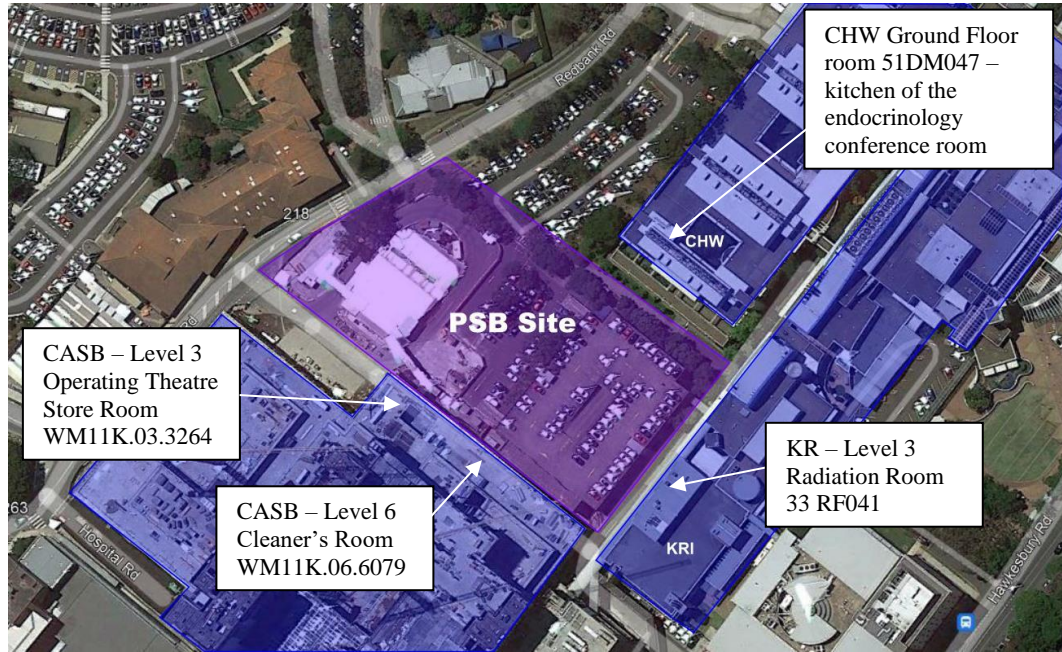


Figure 1: PSB noise monitoring locations.



Figure 2: MSCP noise monitoring locations.

3 Noise Management Levels

The current construction Noise Management Levels for each internal monitoring location are set out in Table 1.

Measurement data taken from ‘standard’ construction work hours for the project only are assessed against the Noise Management Level criteria, being:

- 7am-6pm Mon-Fri
- 8am-1pm Sat
- No work on Sundays and public holidays.

As part of the previous installation works a baseline noise study was conducted to determine appropriate noise management level. Refer to Arup’s *Baseline noise measurements* report¹ for details regarding how these Management Levels were nominated.

Table 1: Baseline noise measurement results.

Location	Noise Management Level (upper limit), dB L _{Aeq,15min}
CHW Ground Floor room 51DM047 – kitchen of the endocrinology conference room (facing PSB site)	60
CASB Level 3 Operating Theatre Store Room WM11K.03.3264 (facing PSB site)	50
CASB Level 6 Cleaner’s Room WM11K.06.6079 (facing PSB site)	52
KR Level 3 Radiation Room 33 RF041(facing PSB site)	58
CHW Level 2 Consult Room 92BW025 (facing MSCP site)	64
RMH Level 1 Store Room 101 (facing MSCP site)	47

3.1 Management Level updates

The following provides a progressive record of management level updates:

- None to-date.

¹ Arup report reference 271985-AC02.

4 Noise monitoring results

4.1 Excluded monitoring periods

The following monitoring period/s have been excluded from assessment:

- 1–8 Feb 2022: Arup were instructed to activate the noise monitoring systems when construction activities commenced on-site on 9 Feb 2022. The days prior have therefore been excluded from the assessment period.

4.2 Outages

Noise monitoring outages are shown below. This excludes outages related to logger data collection and calibration.

Table 2: Noise logger outages during monitoring period.

Noise logger location	Outages
CHW Ground Floor room 51DM047 – kitchen of the endocrinology conference room (facing PSB site)	-
CASB Level 3 Operating Theatre Store Room WM11K.03.3264 (facing PSB site)	-
CASB Level 6 Cleaner’s Room WM11K.06.6079 (facing PSB site)	-
KR Level 3 Radiation Room 33 RF041(facing PSB site)	-
CHW Level 2 Consult Room 92BW025 (facing MSCP site)	-
RMH Level 1 Store Room 101 (facing MSCP site)	-

4.3 Exceedances

The number of Management Level exceedances recorded at each noise monitoring location during the assessment period are shown below.

Table 3: Recorded Management Level exceedances.

Noise logger location	Noise Management Level exceedance instances
CHW Ground Floor room 51DM047 – kitchen of the endocrinology conference room (facing PSB site)	3
CASB Level 3 Operating Theatre Store Room WM11K.03.3264 (facing PSB site)	4
CASB Level 6 Cleaner’s Room WM11K.06.6079 (facing PSB site)	6
KR Level 3 Radiation Room 33 RF041(facing PSB site)	1
CHW Level 2 Consult Room 92BW025 (facing MSCP site)	23
RMH Level 1 Store Room 101 (facing MSCP site)	11

It is the responsibility of Ford Civils (the Head Contractor) to respond to each Noise Management Level exceedance when it occurs and record the outcome of the exceedance investigation (cause of NML exceedance, any noise mitigation measures implemented to address the exceedance, etc.).

4.4 Daily noise monitoring results

Daily noise monitoring results are showing for each location in Appendix A.


Appendix A

Noise Monitoring Daily Results

A1 CHW Ground Floor room 51DM047 (Westmead 1)


Unattended monitoring: Westmead 1 (Internal)

ARUP

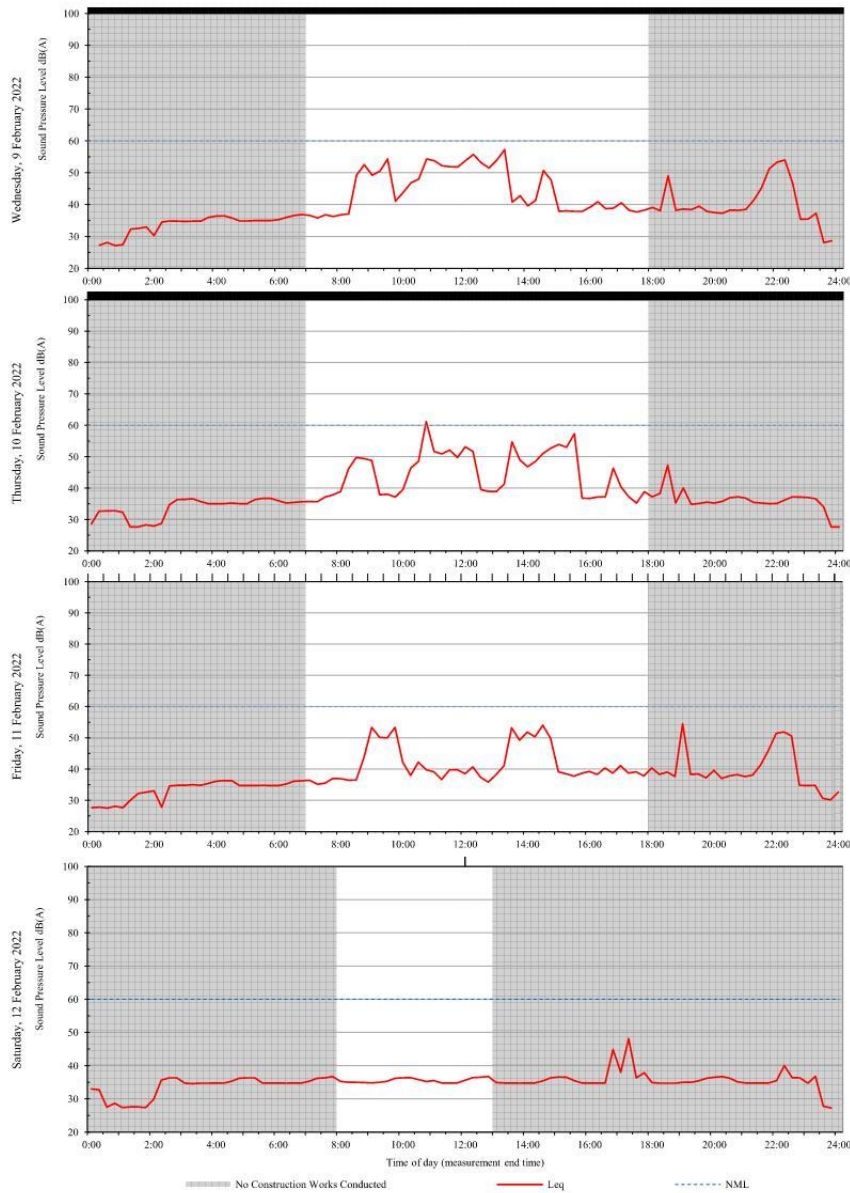


Unattended monitoring: Westmead 1 (Internal)

ARUP

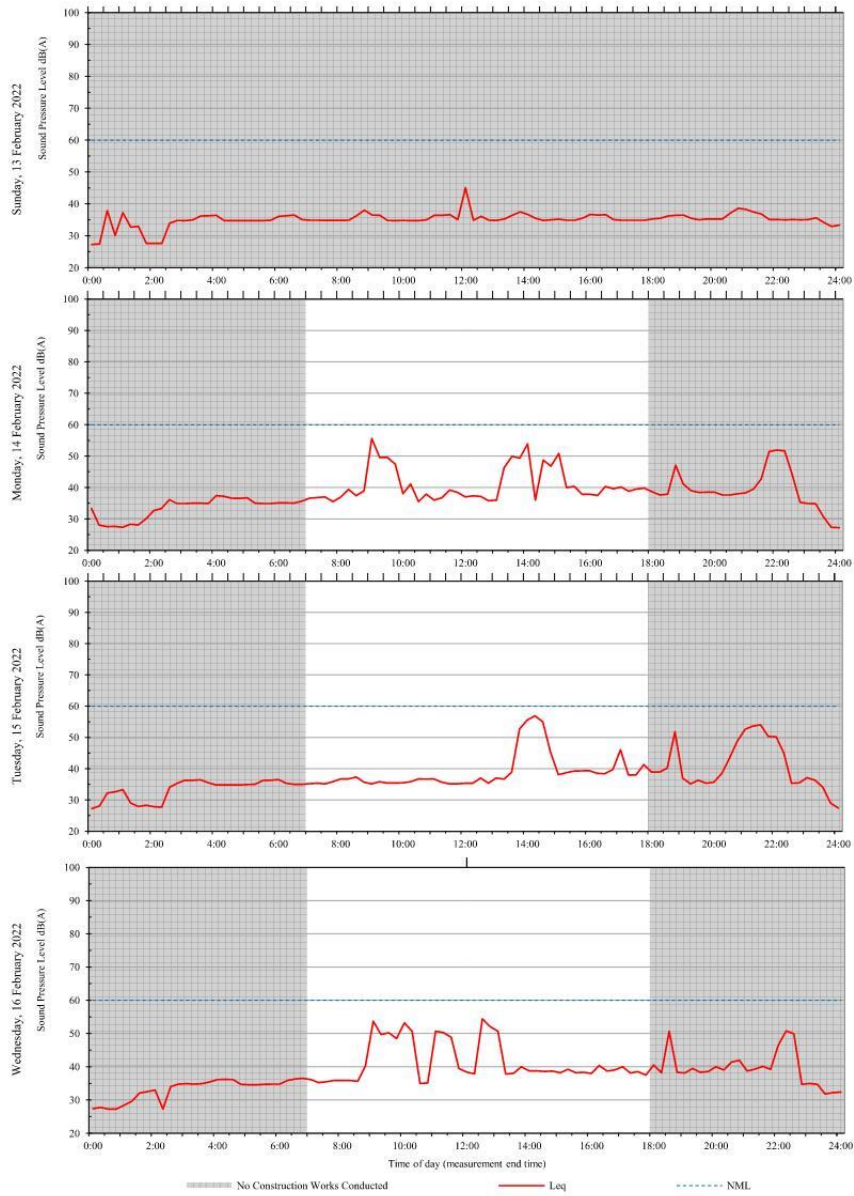


Unattended monitoring: Westmead 1 (Internal)

ARUP

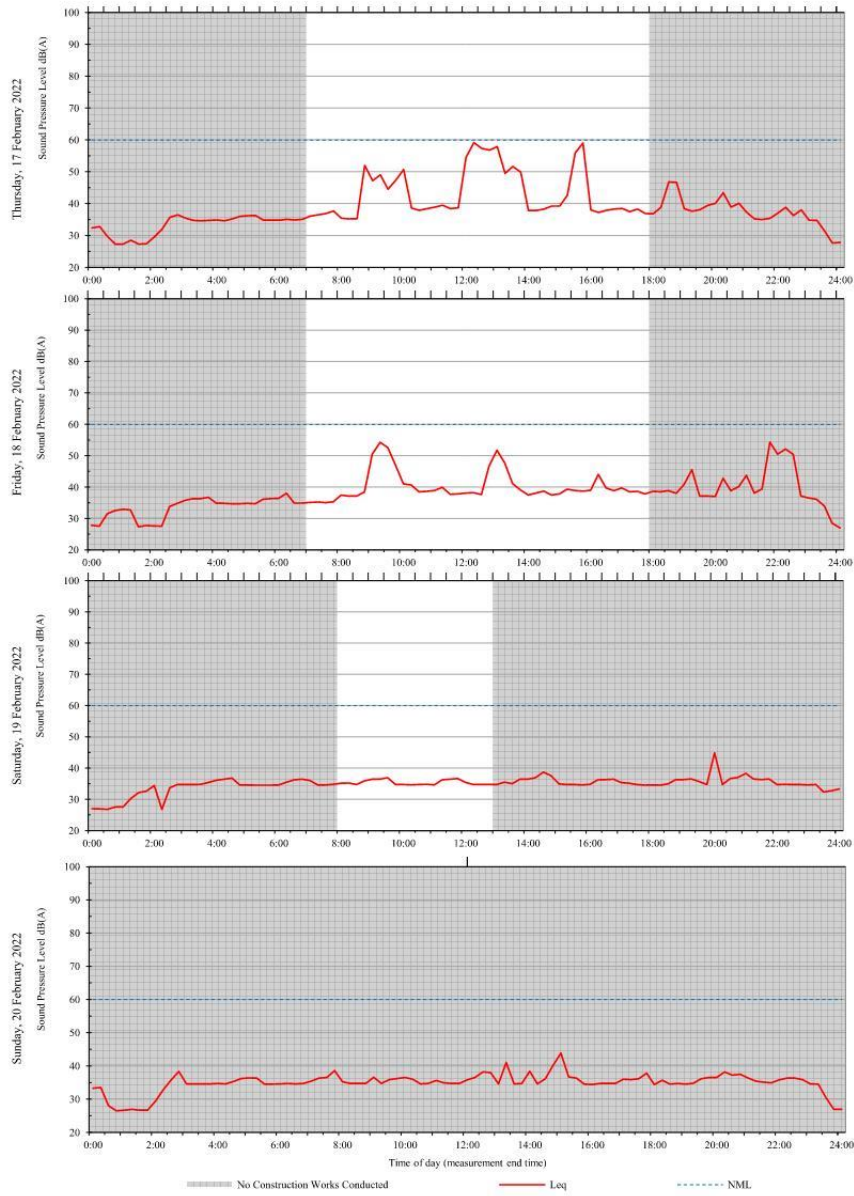


Unattended monitoring: Westmead 1 (Internal)

ARUP

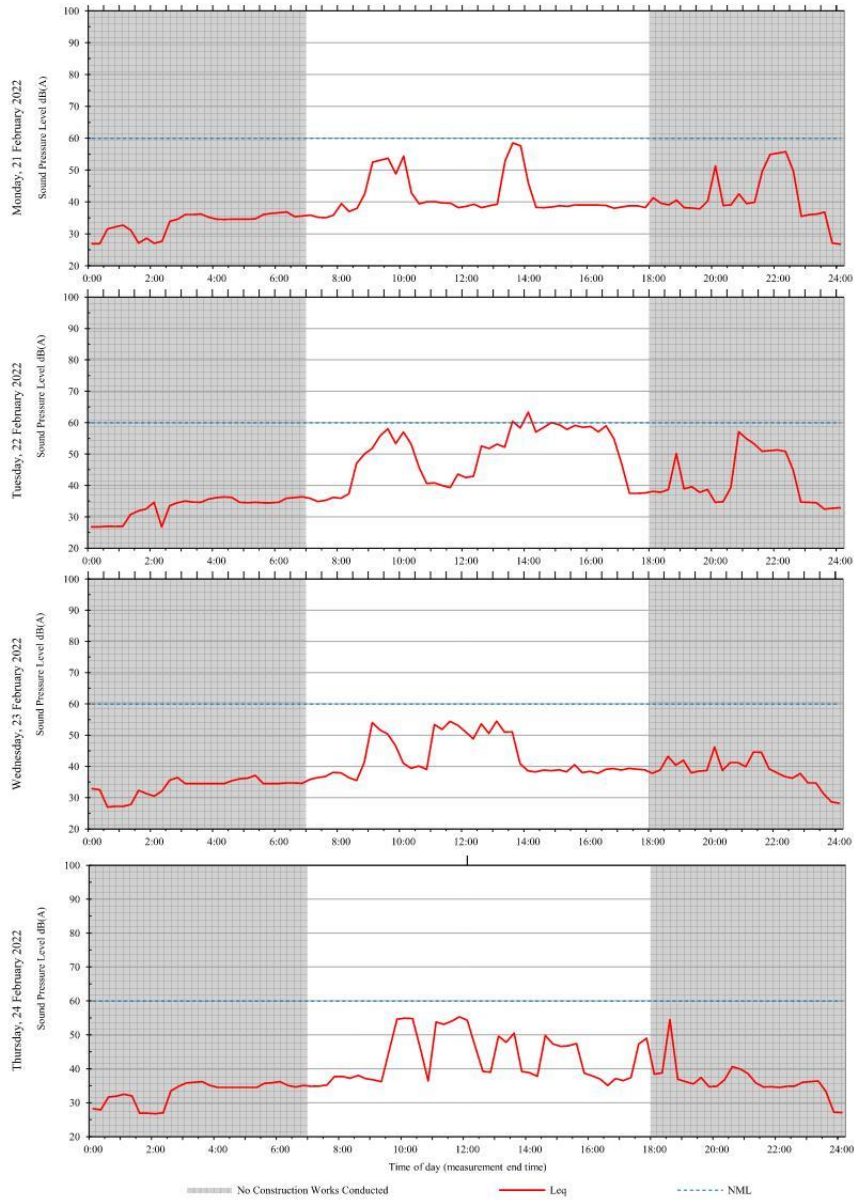

Unattended monitoring: Westmead 1 (Internal)


ARUP

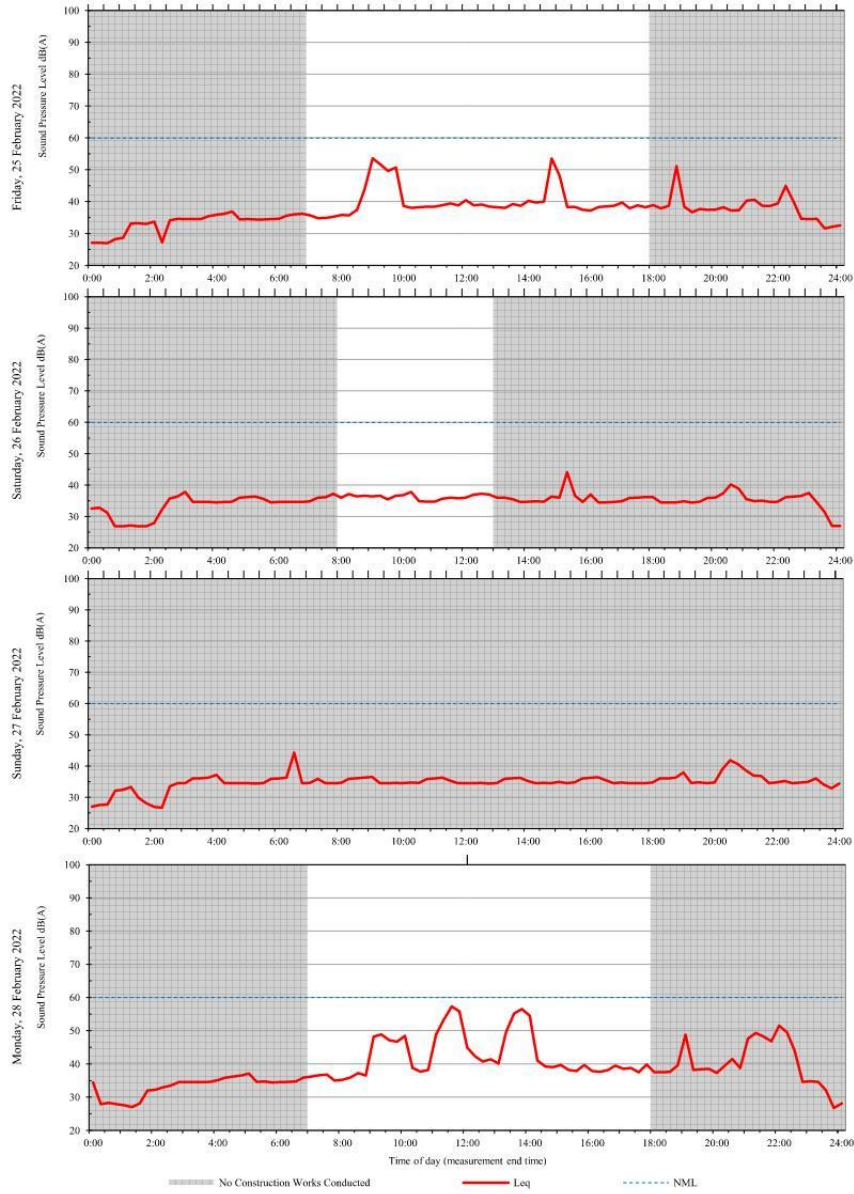

A2 CASB Level 3 Operating Theatre Store Room WM11K.03.3264 (Westmead 5)


Unattended monitoring: Westmead 5 (Internal)

ARUP

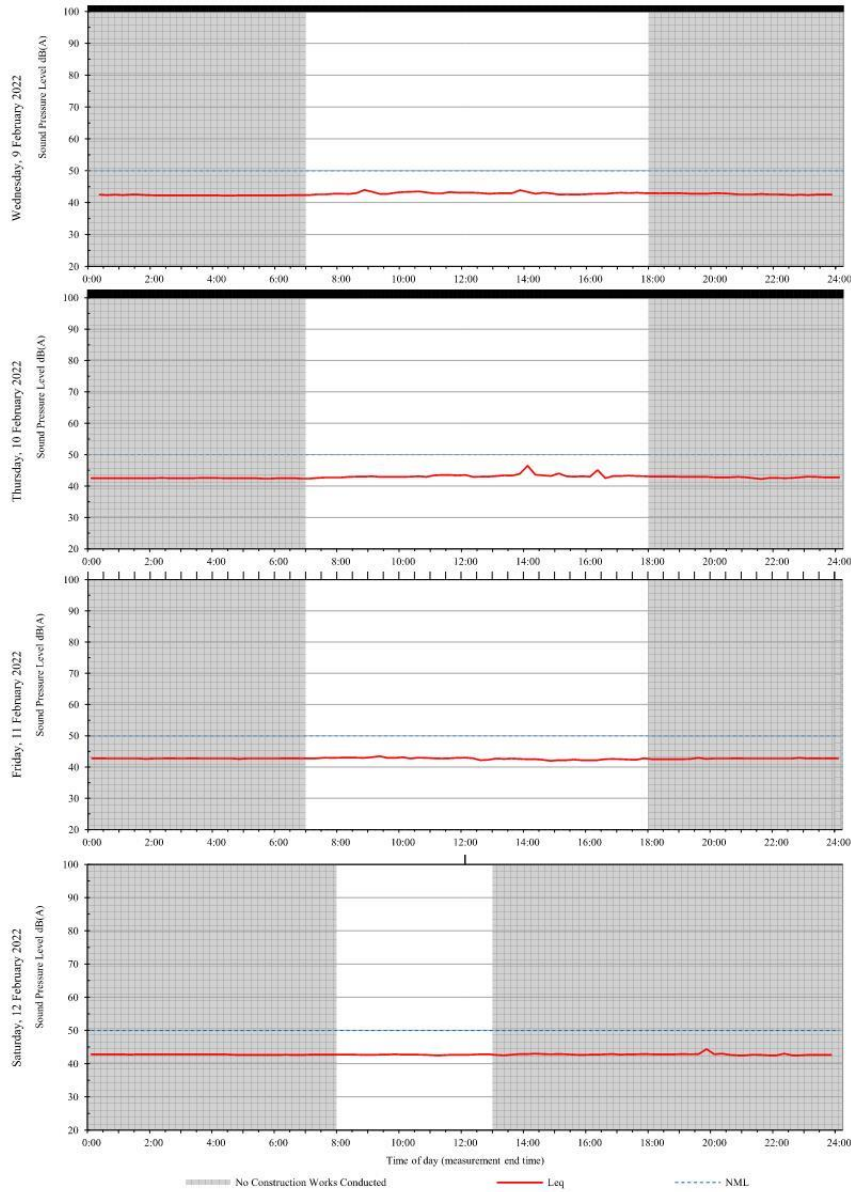


Unattended monitoring: Westmead 5 (Internal)

ARUP

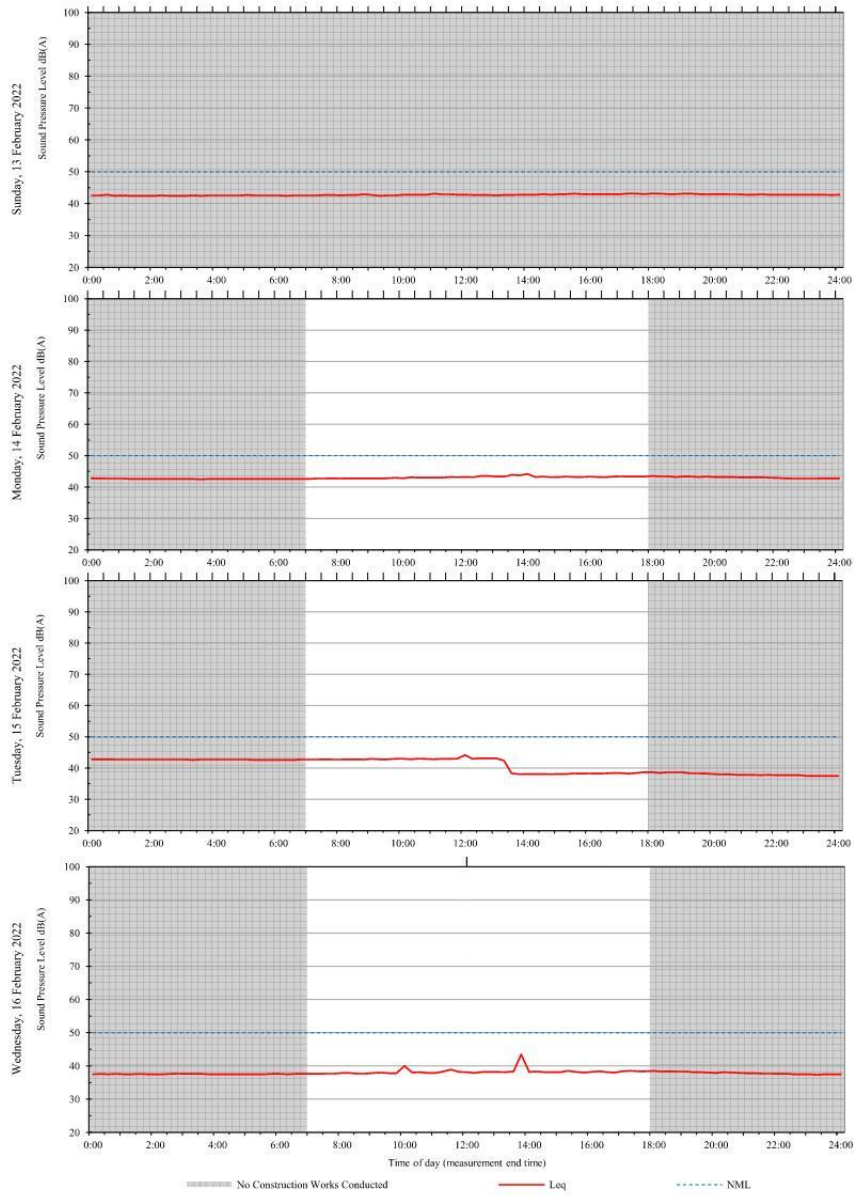


Unattended monitoring: Westmead 5 (Internal)

ARUP

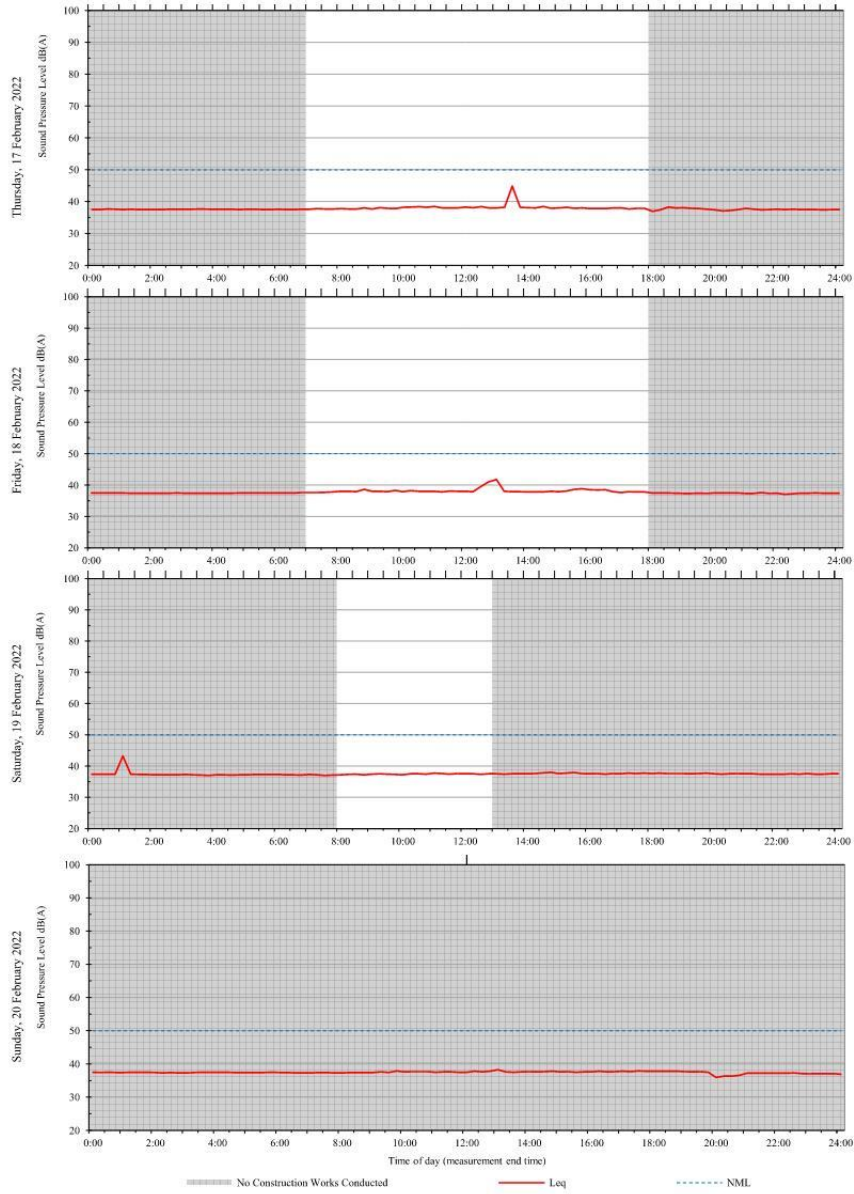


Unattended monitoring: Westmead 5 (Internal)

ARUP

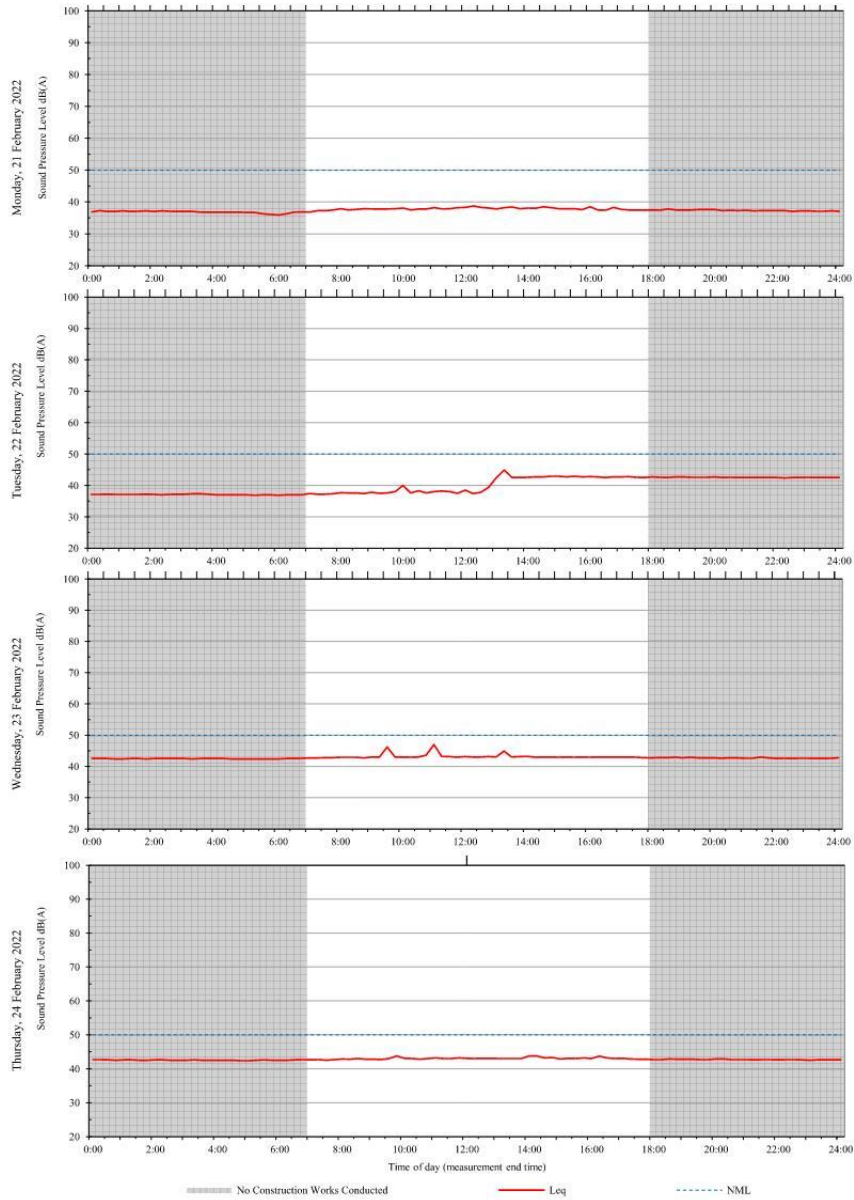

Unattended monitoring: Westmead 5 (Internal)


ARUP

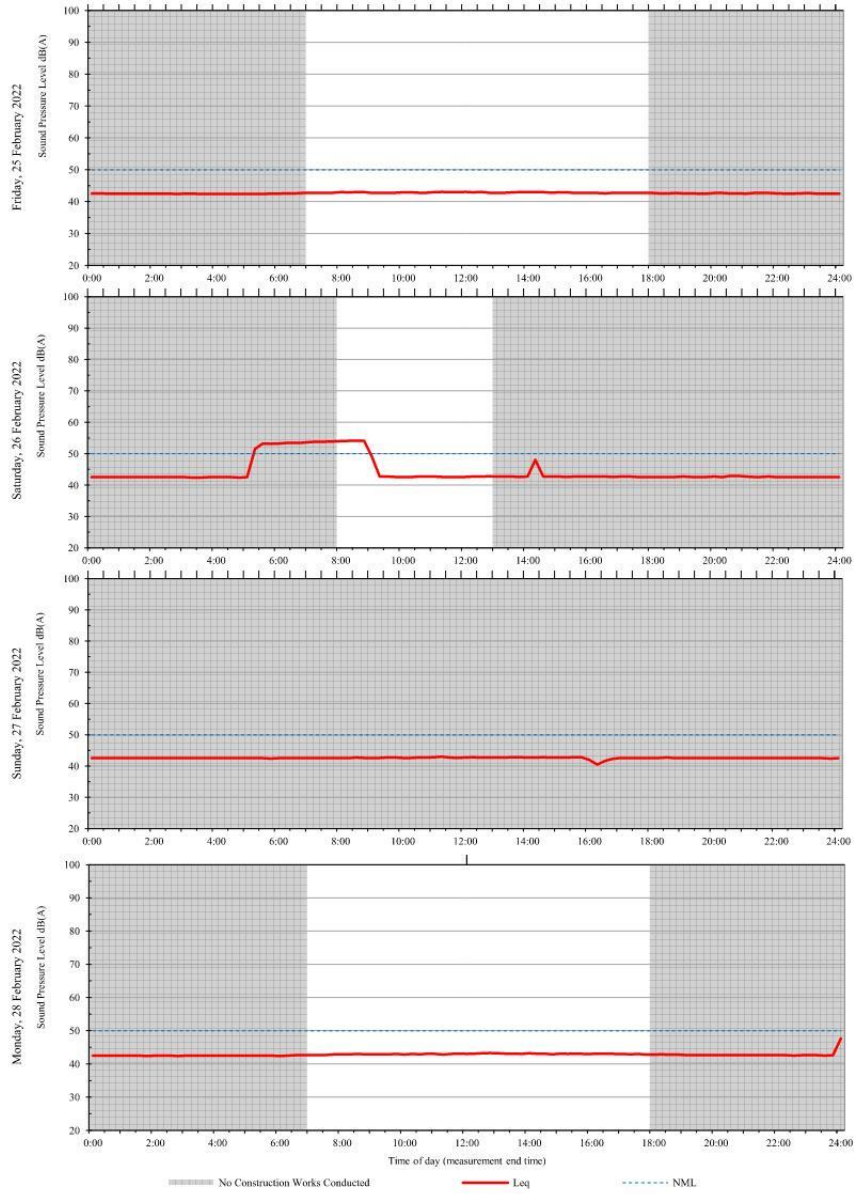

A3 CASB Level 6 Cleaner's Room WM11K.06.6079 (Westmead 6)


Unattended monitoring: Westmead 6 (Internal)

ARUP

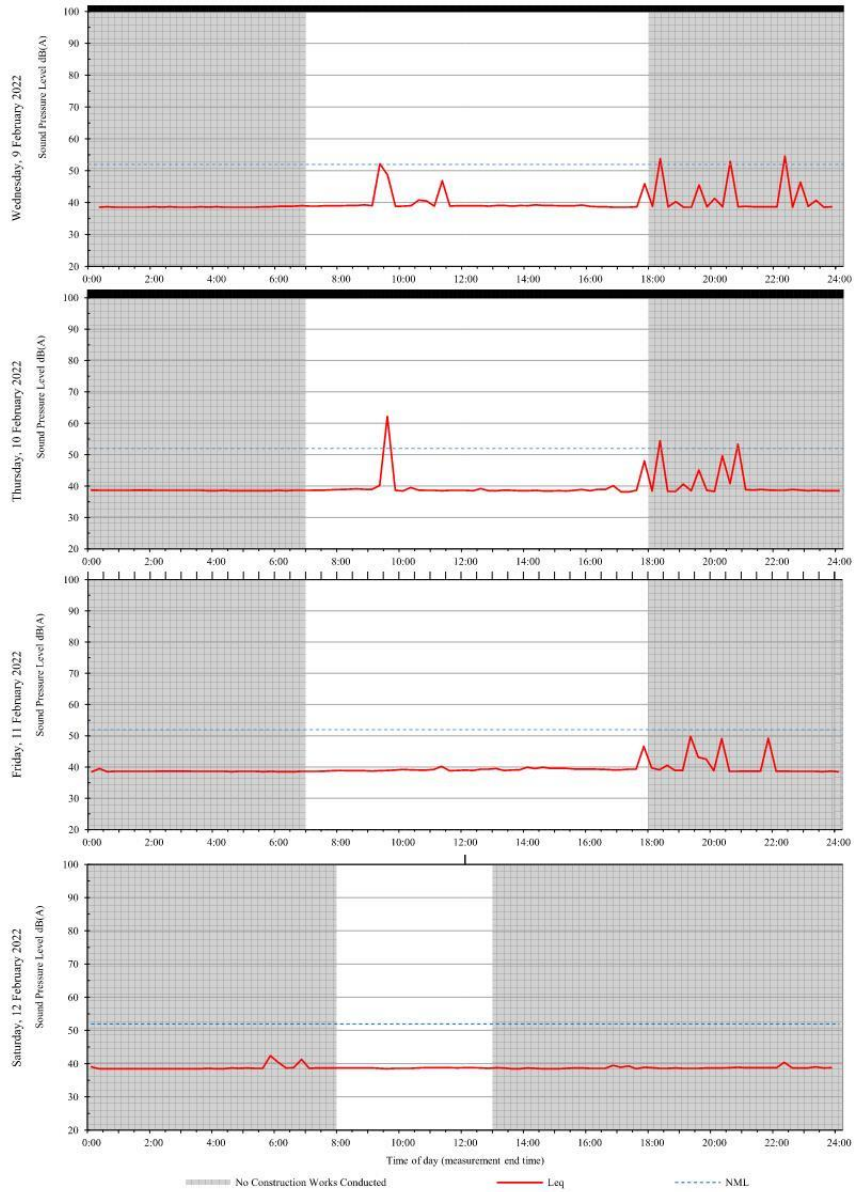


Unattended monitoring: Westmead 6 (Internal)

ARUP

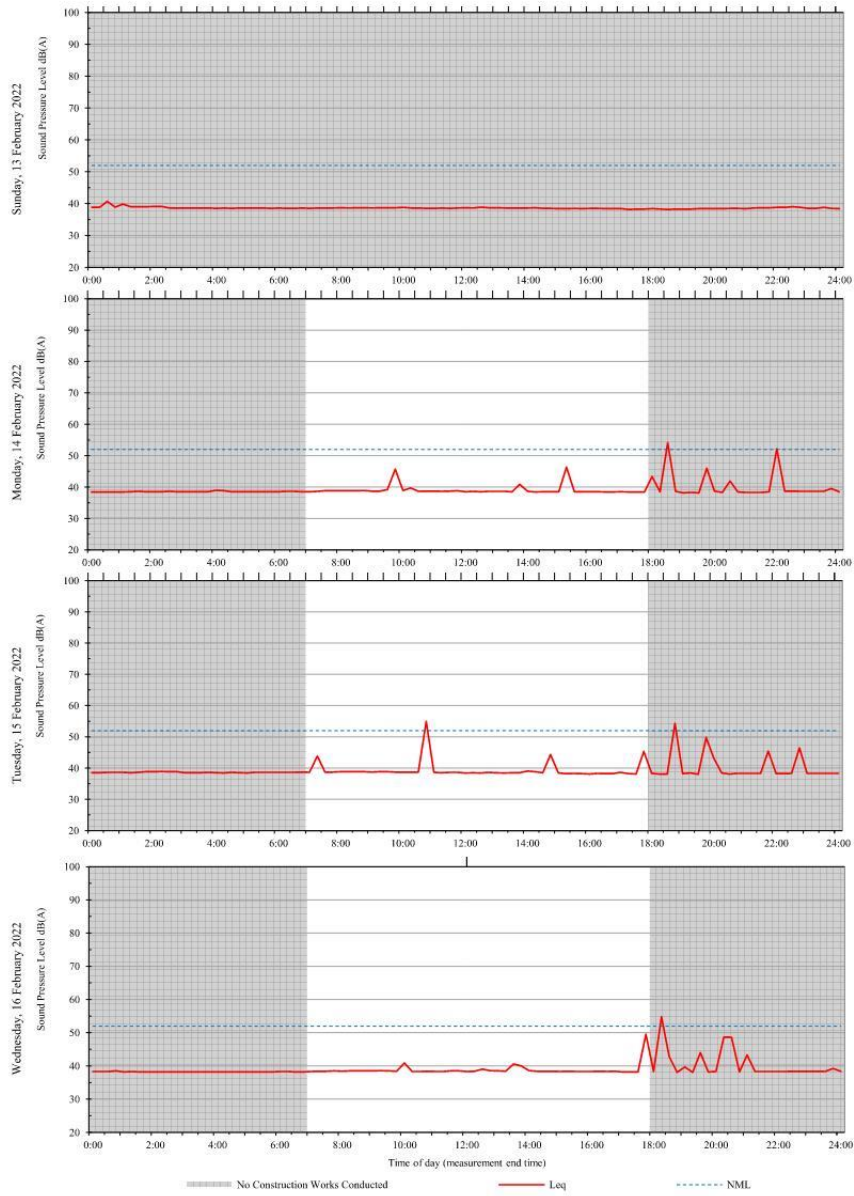


Unattended monitoring: Westmead 6 (Internal)

ARUP

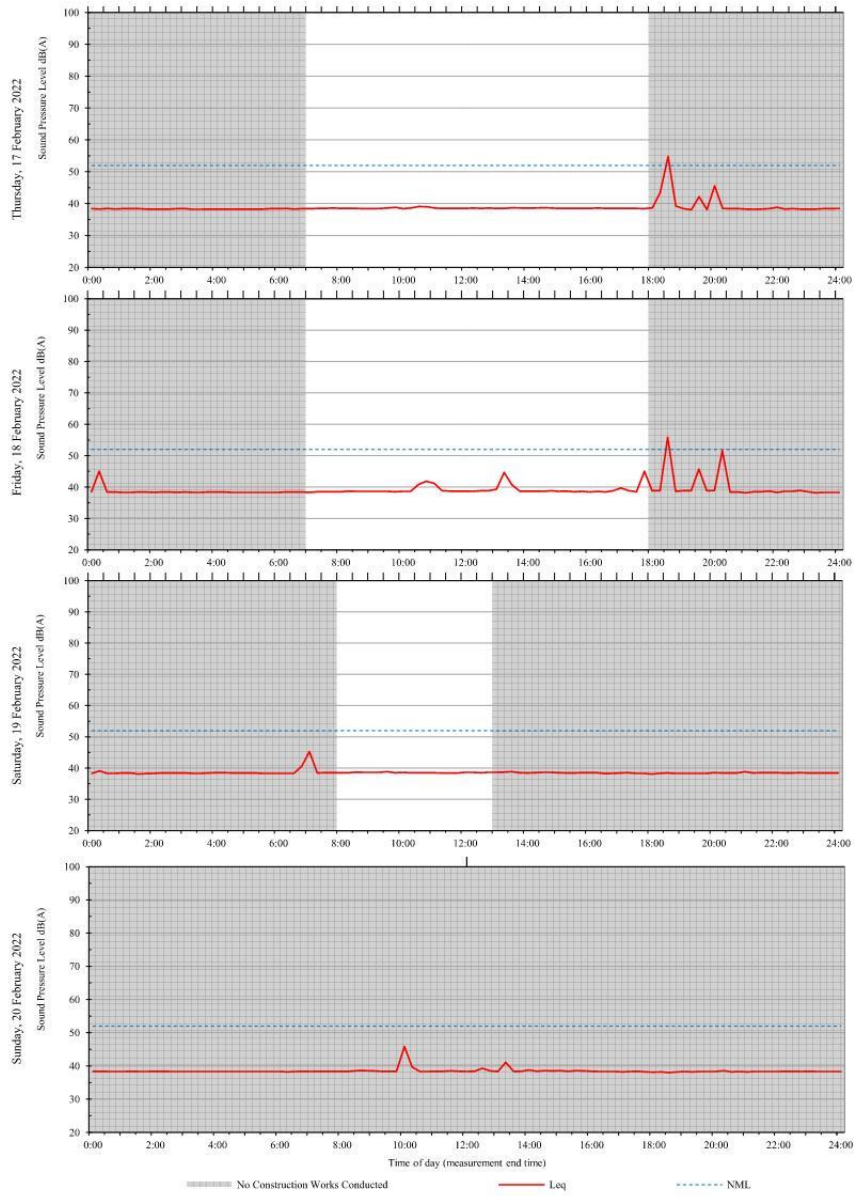


Unattended monitoring: Westmead 6 (Internal)

ARUP

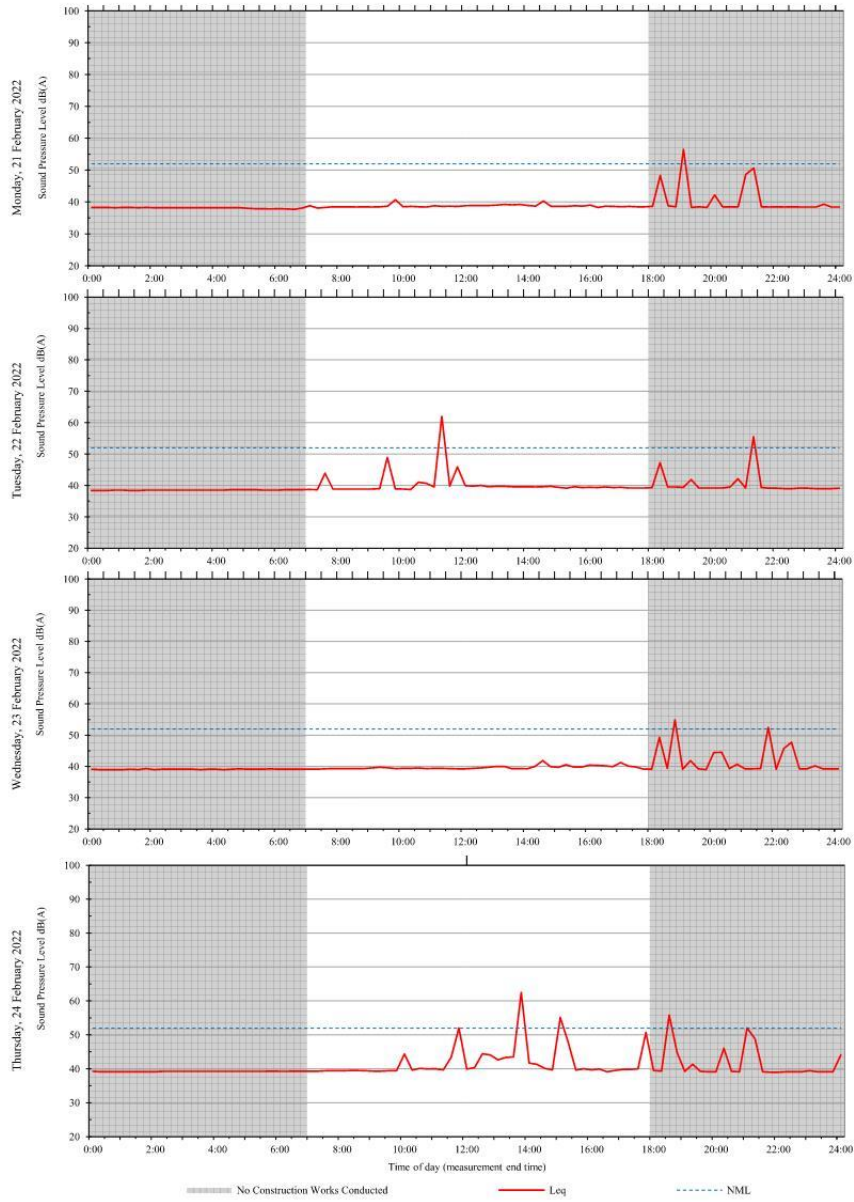

Unattended monitoring: Westmead 6 (Internal)


ARUP

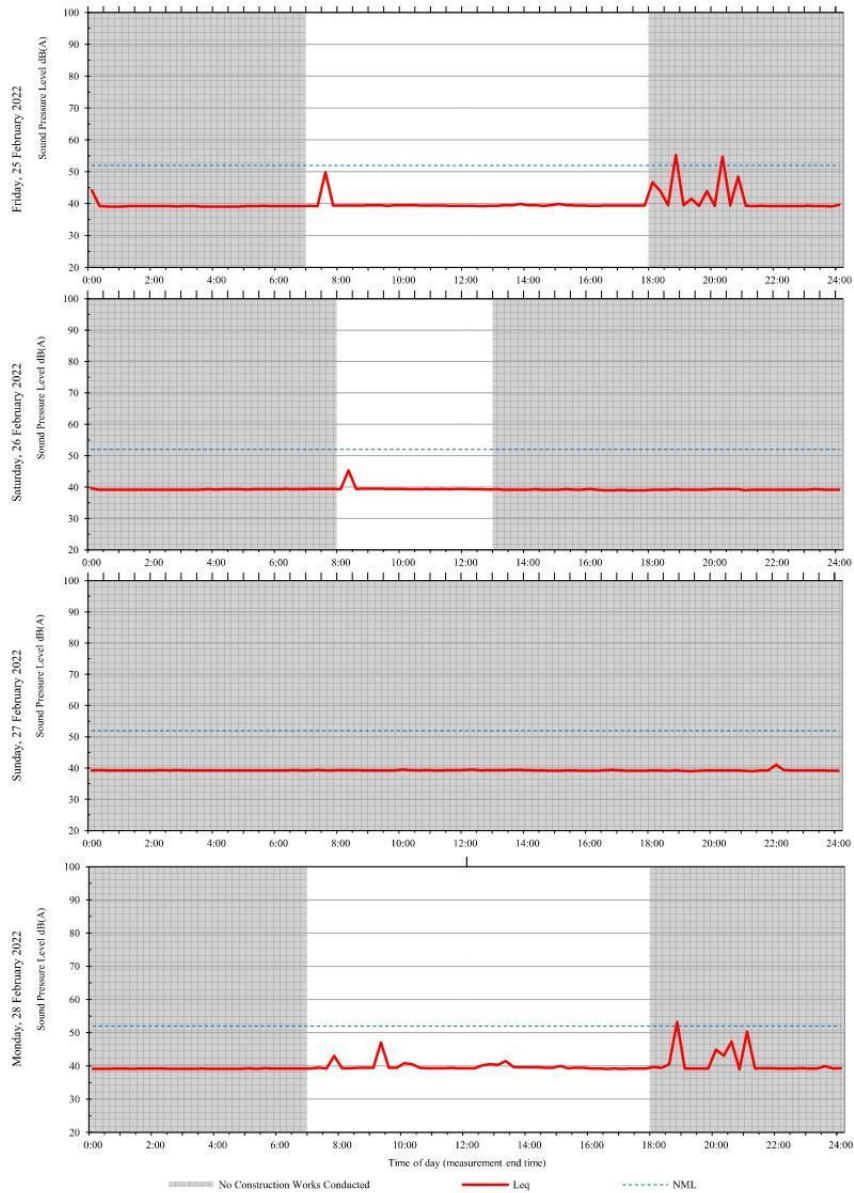

A4 KR Level 3 Radiation Room 33 RF041 (Westmead 7)


Unattended monitoring: Westmead 7 (Internal)

ARUP

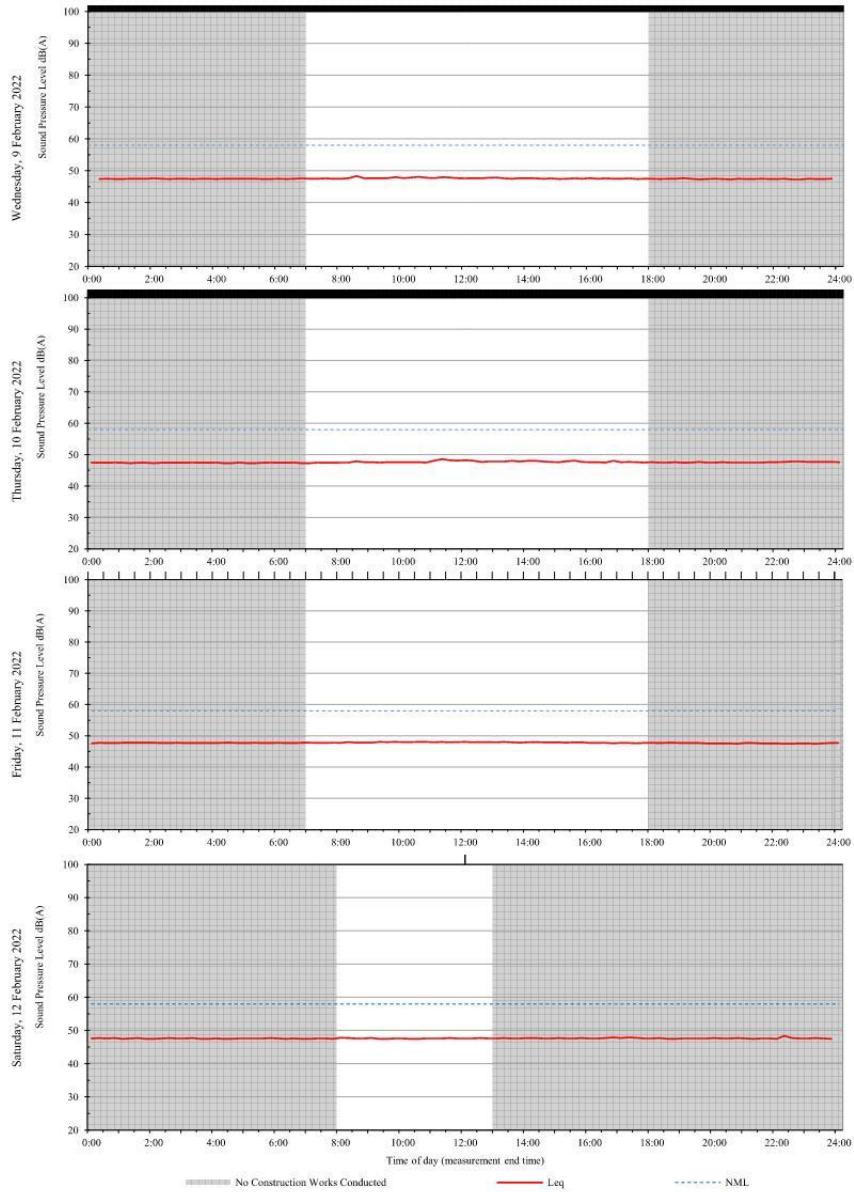


Unattended monitoring: Westmead 7 (Internal)

ARUP

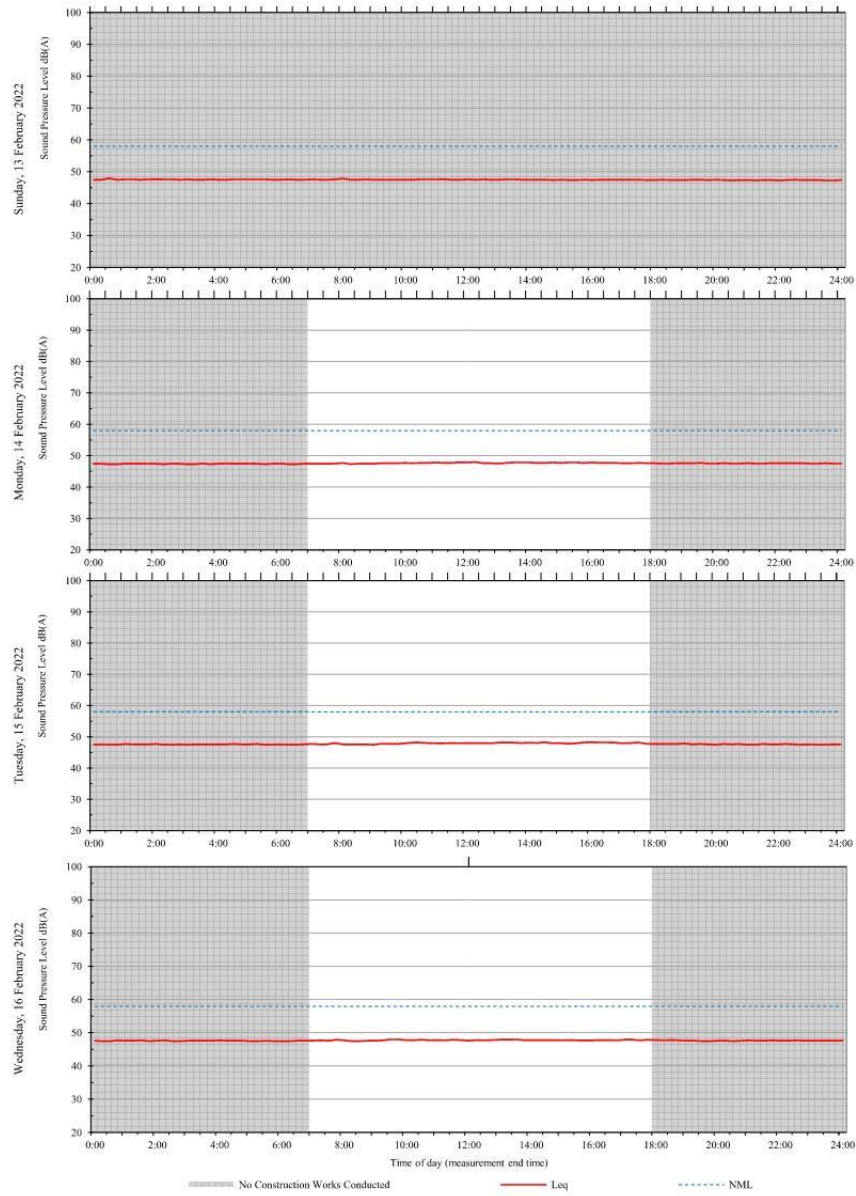


Unattended monitoring: Westmead 7 (Internal)

ARUP

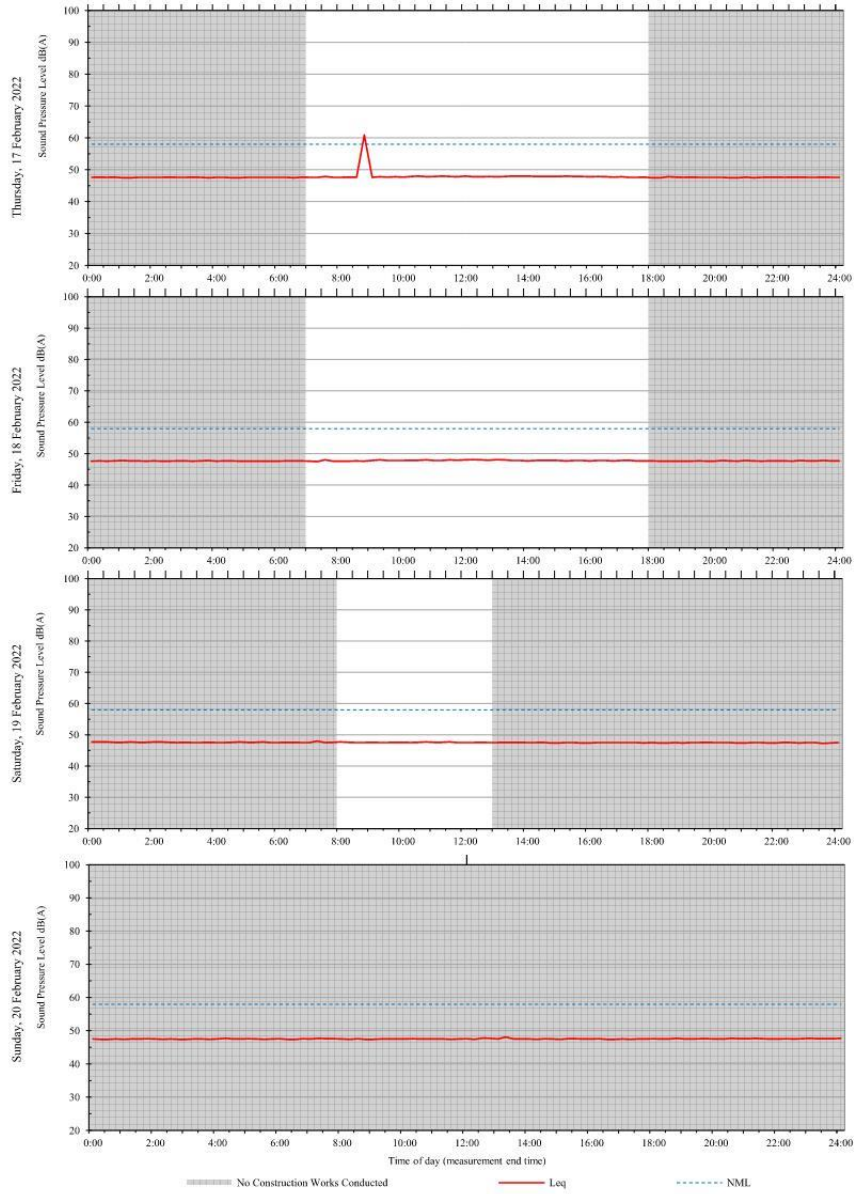


Unattended monitoring: Westmead 7 (Internal)

ARUP

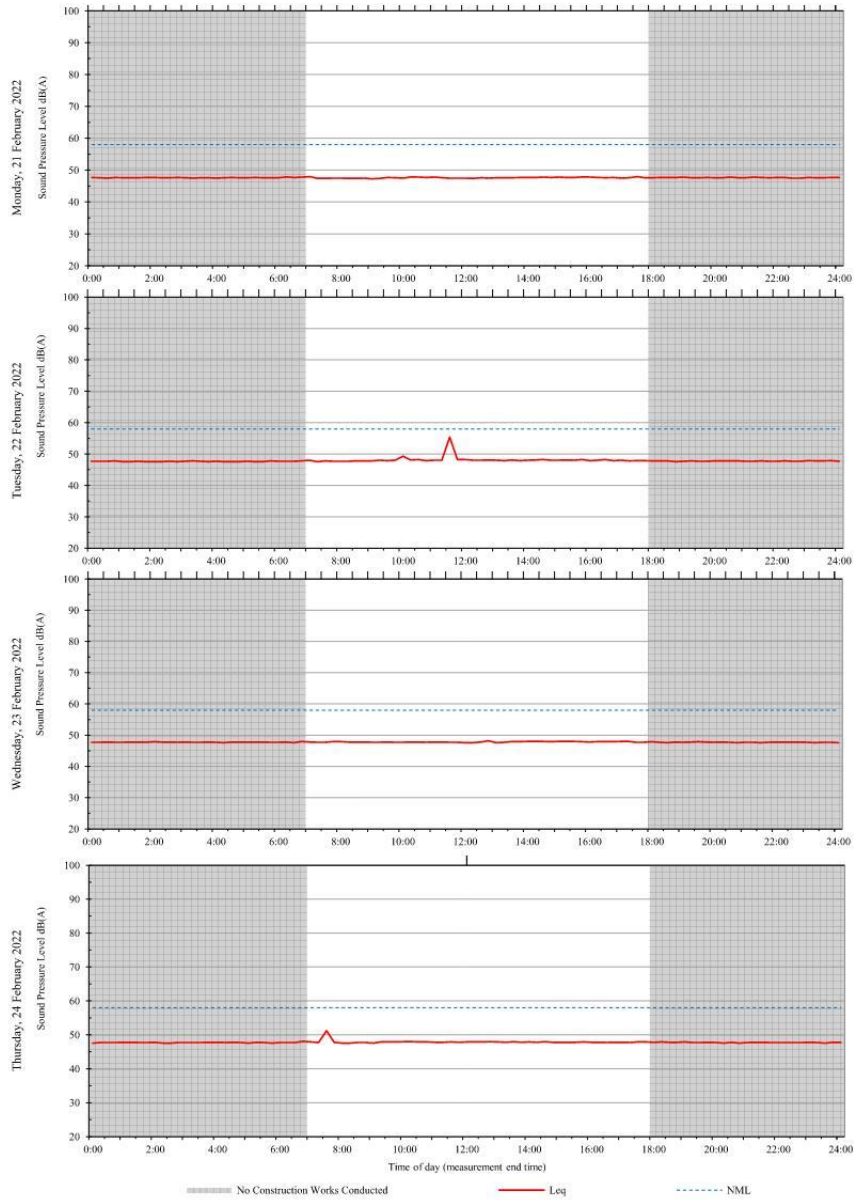

Unattended monitoring: Westmead 7 (Internal)


ARUP

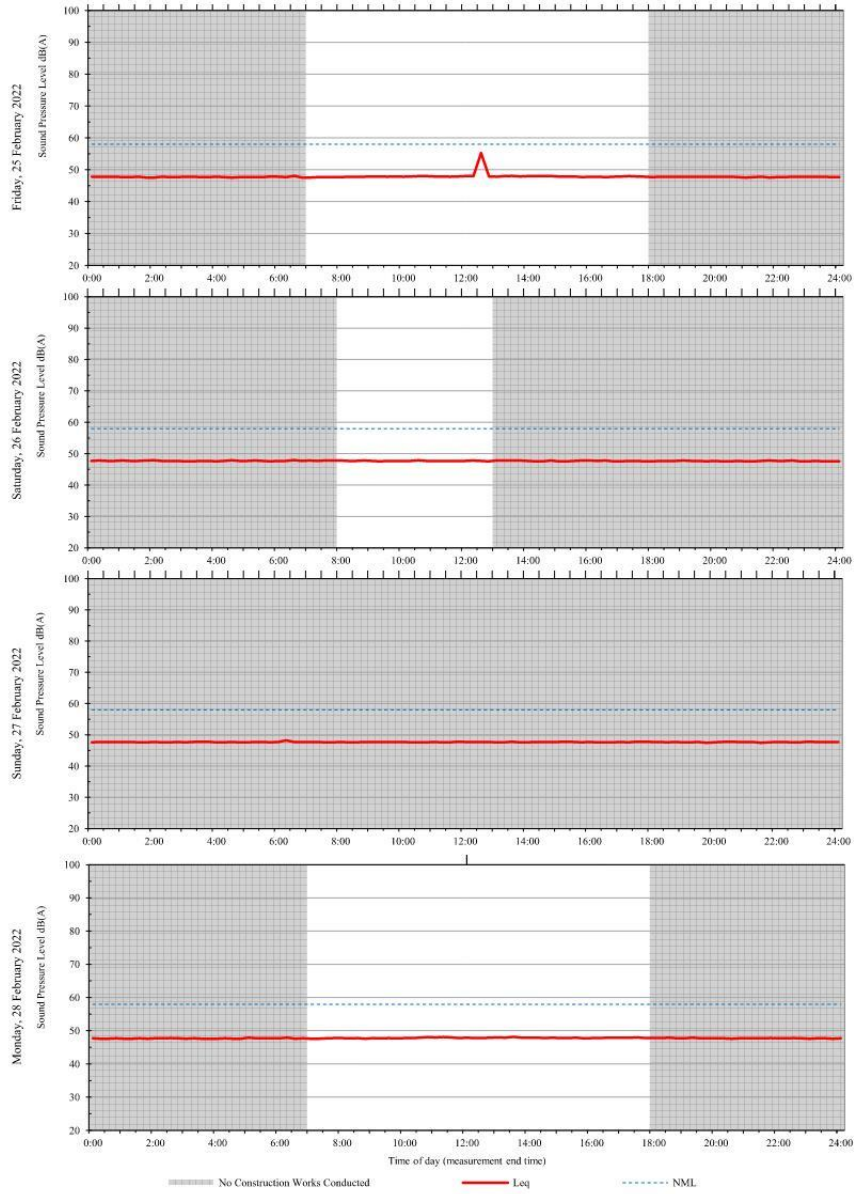

A5 CHW Level 2 Consult Room 92BW025 (Westmead 2)


Unattended monitoring: Westmead 2 (Internal)

ARUP

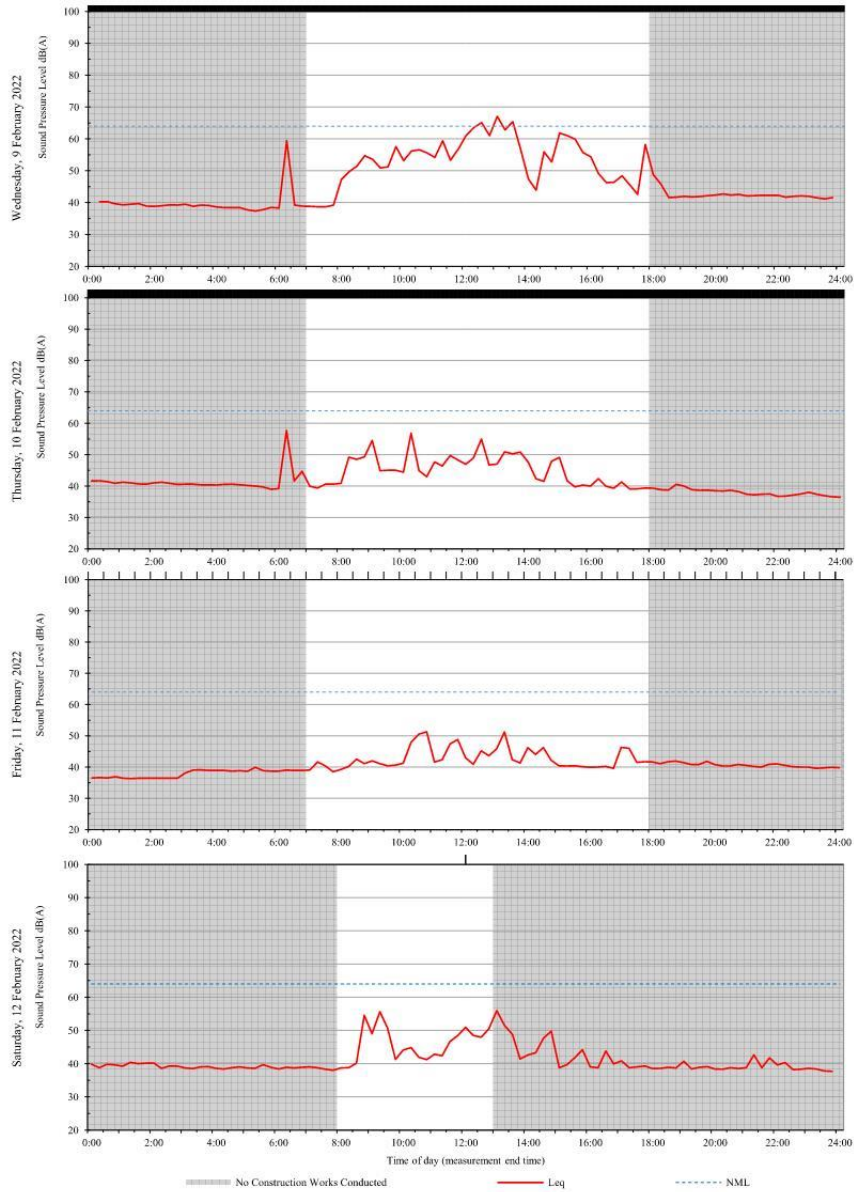


Unattended monitoring: Westmead 2 (Internal)

ARUP

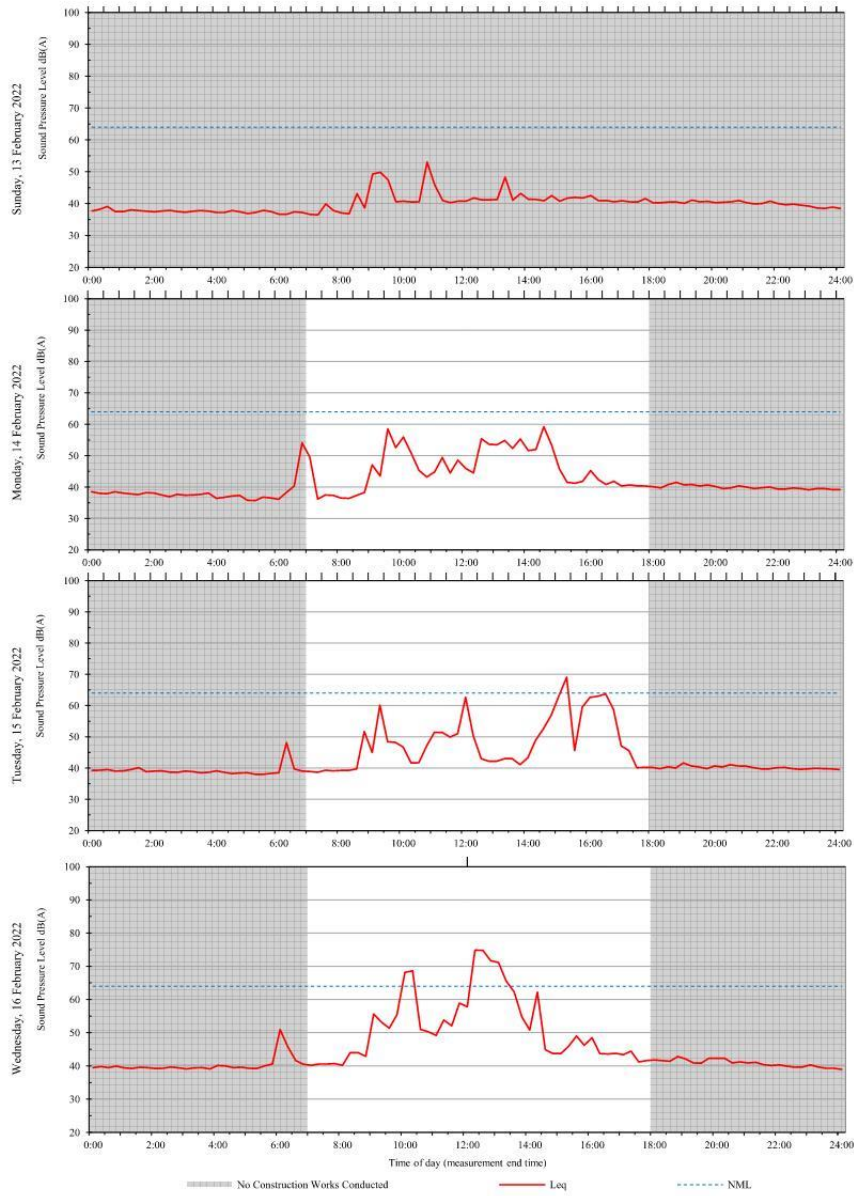


Unattended monitoring: Westmead 2 (Internal)

ARUP

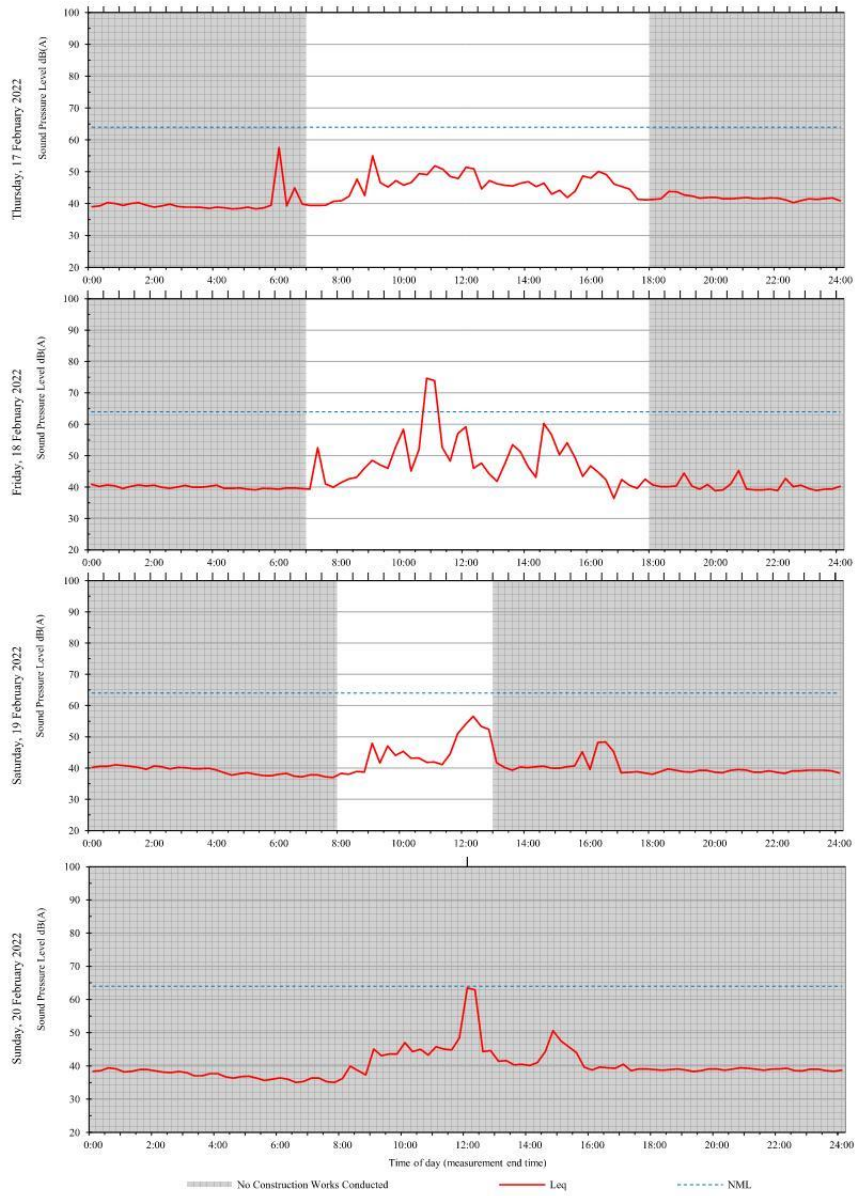


Unattended monitoring: Westmead 2 (Internal)

ARUP

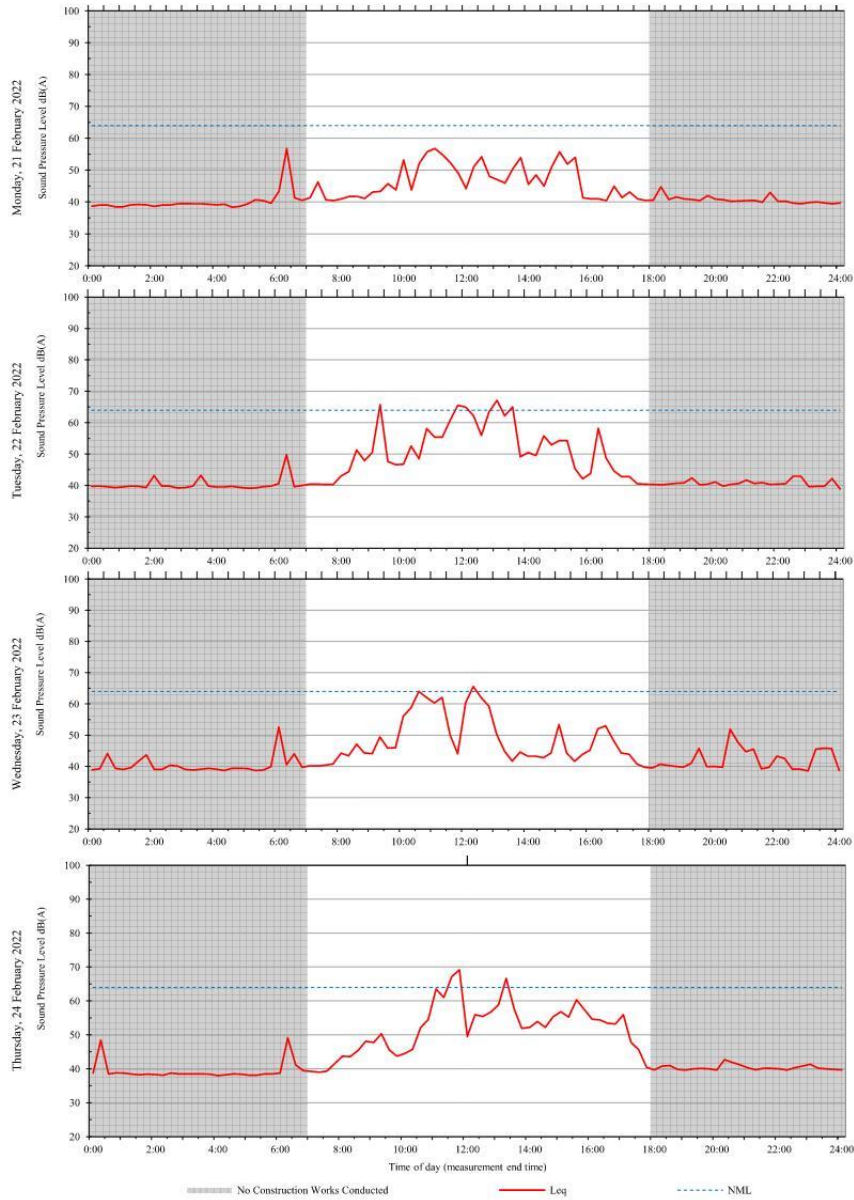

Unattended monitoring: Westmead 2 (Internal)


ARUP

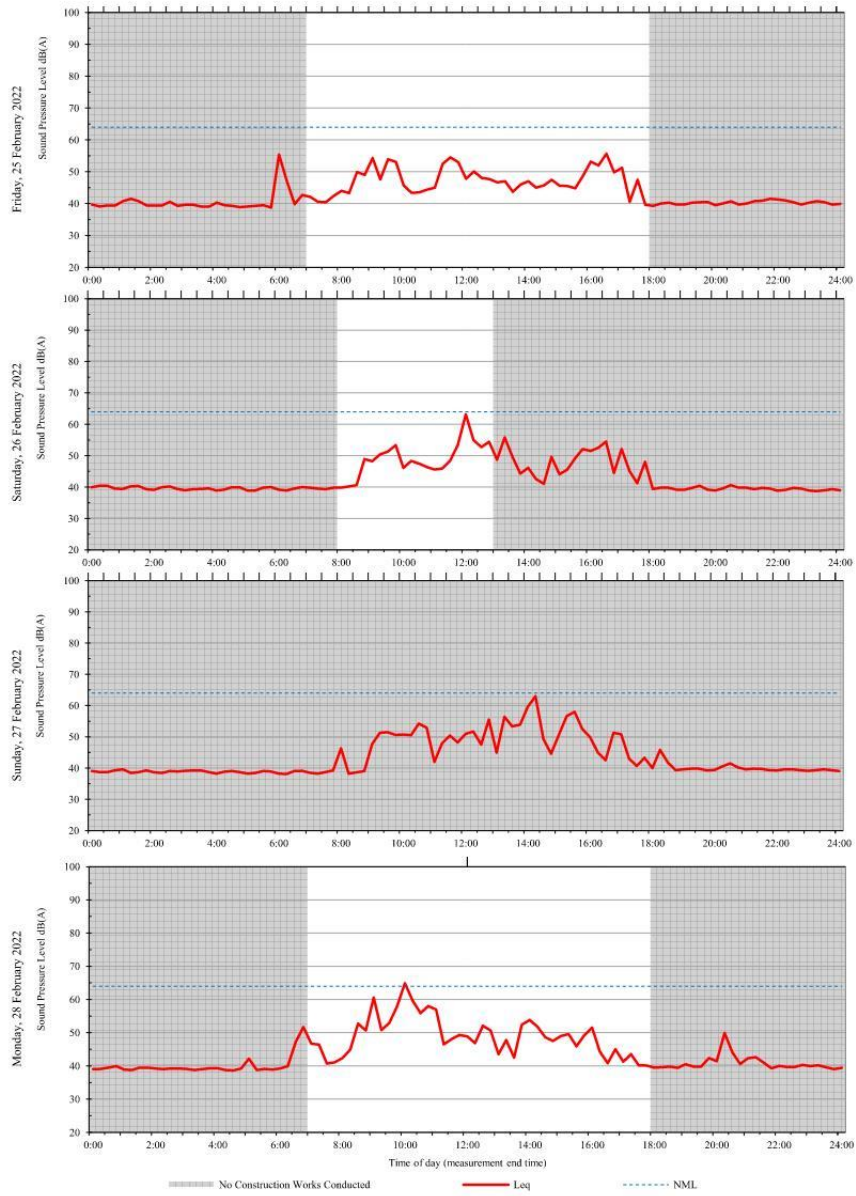

A6 RMH Level 1 Store Room 101 (Westmead 3)


Unattended monitoring: Westmead 3 (Internal)

ARUP

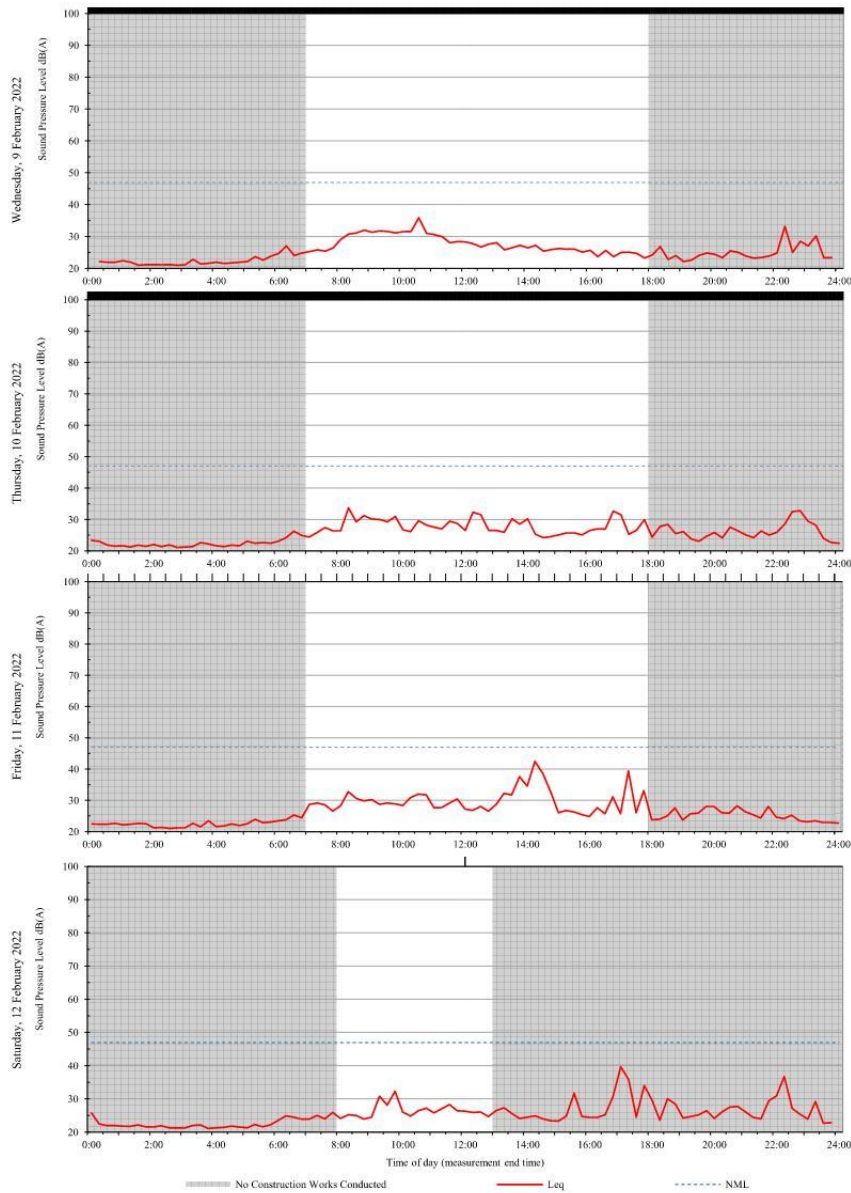


Unattended monitoring: Westmead 3 (Internal)

ARUP

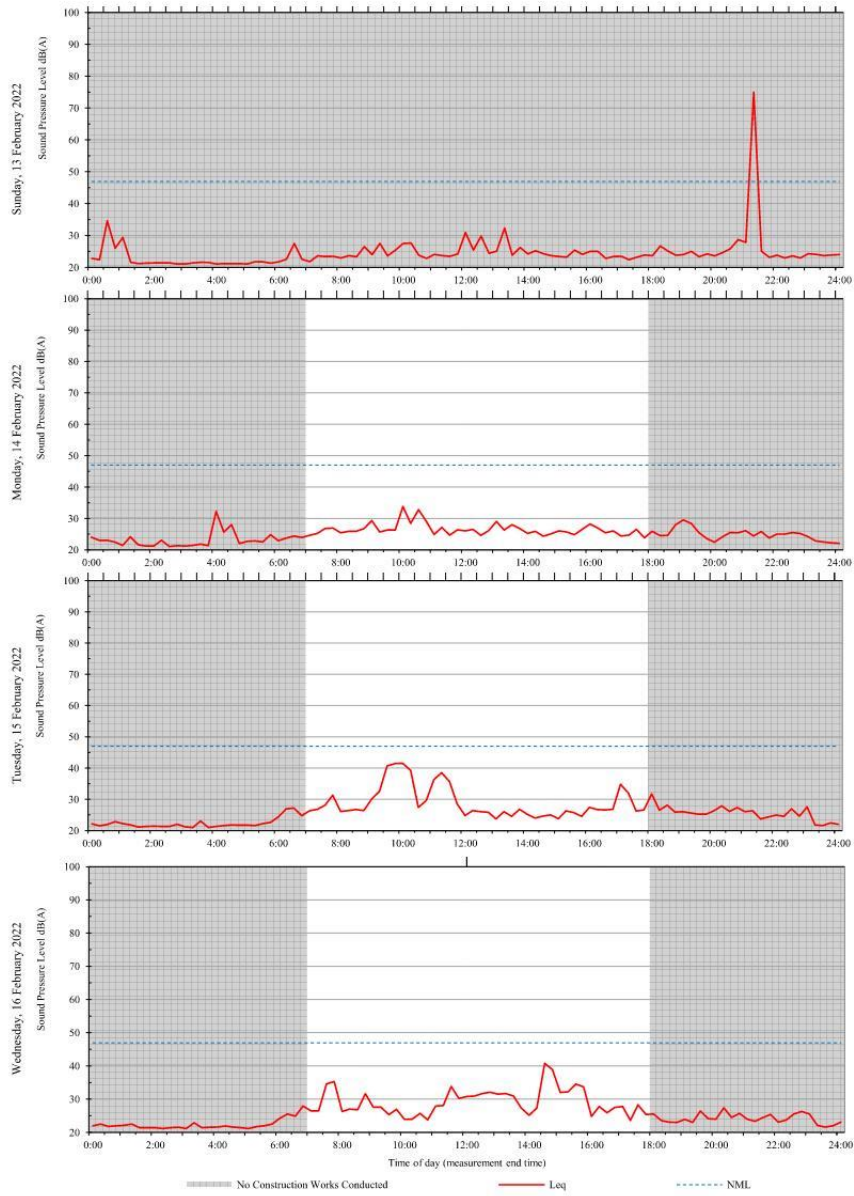


Unattended monitoring: Westmead 3 (Internal)

ARUP

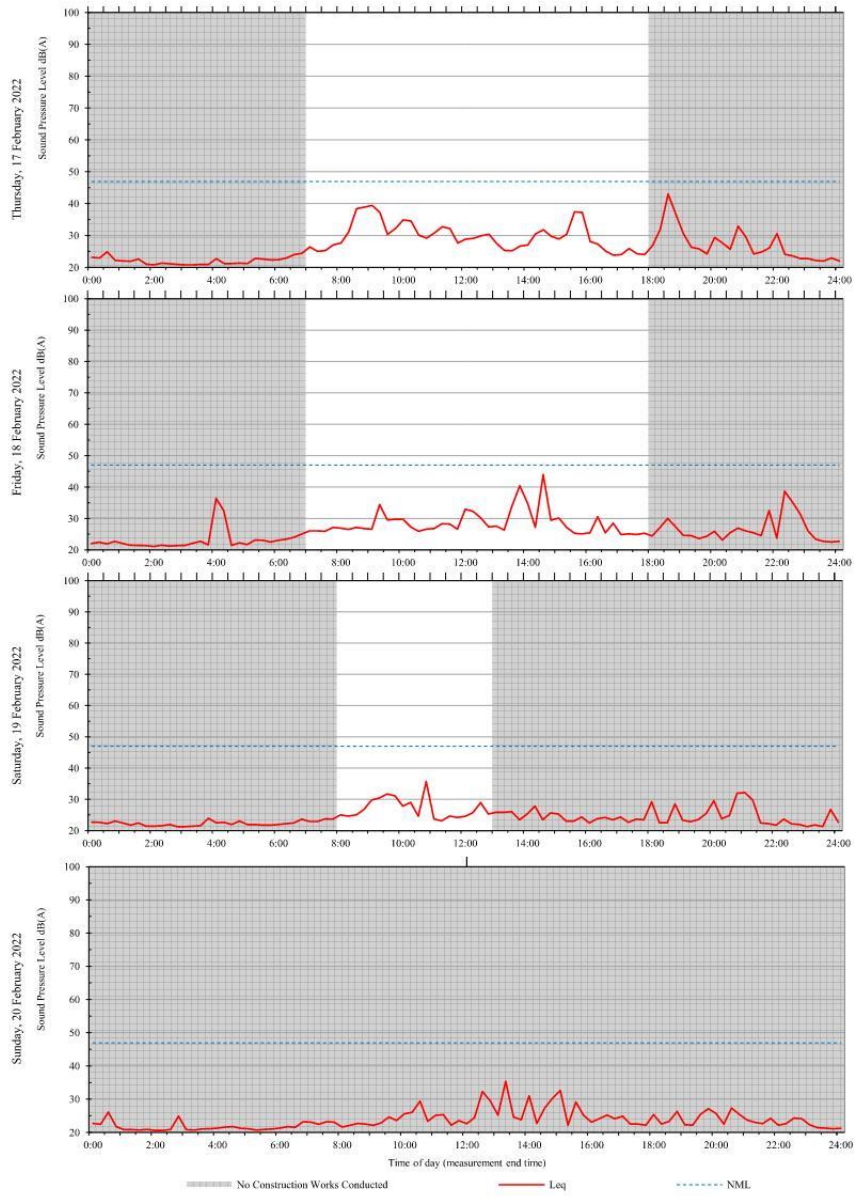


Unattended monitoring: Westmead 3 (Internal)

ARUP

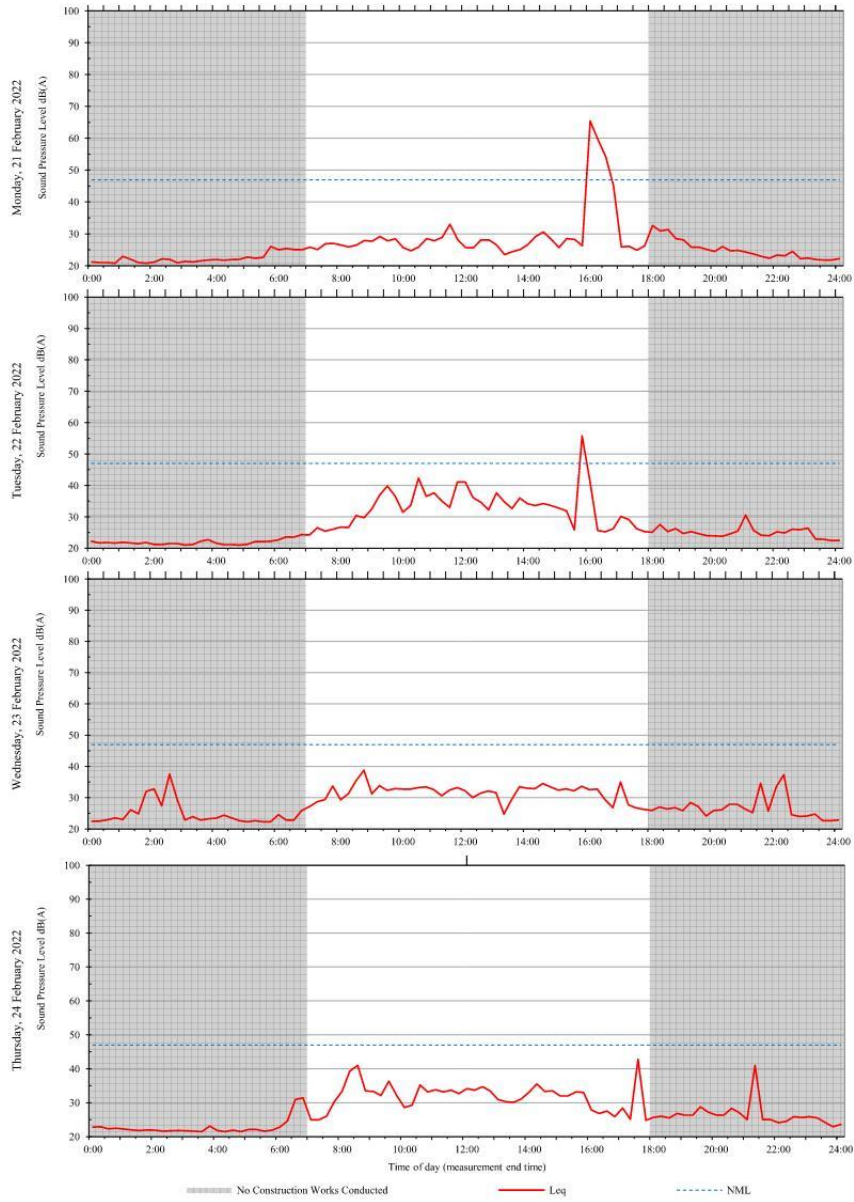

Unattended monitoring: Westmead 3 (Internal)

ARUP

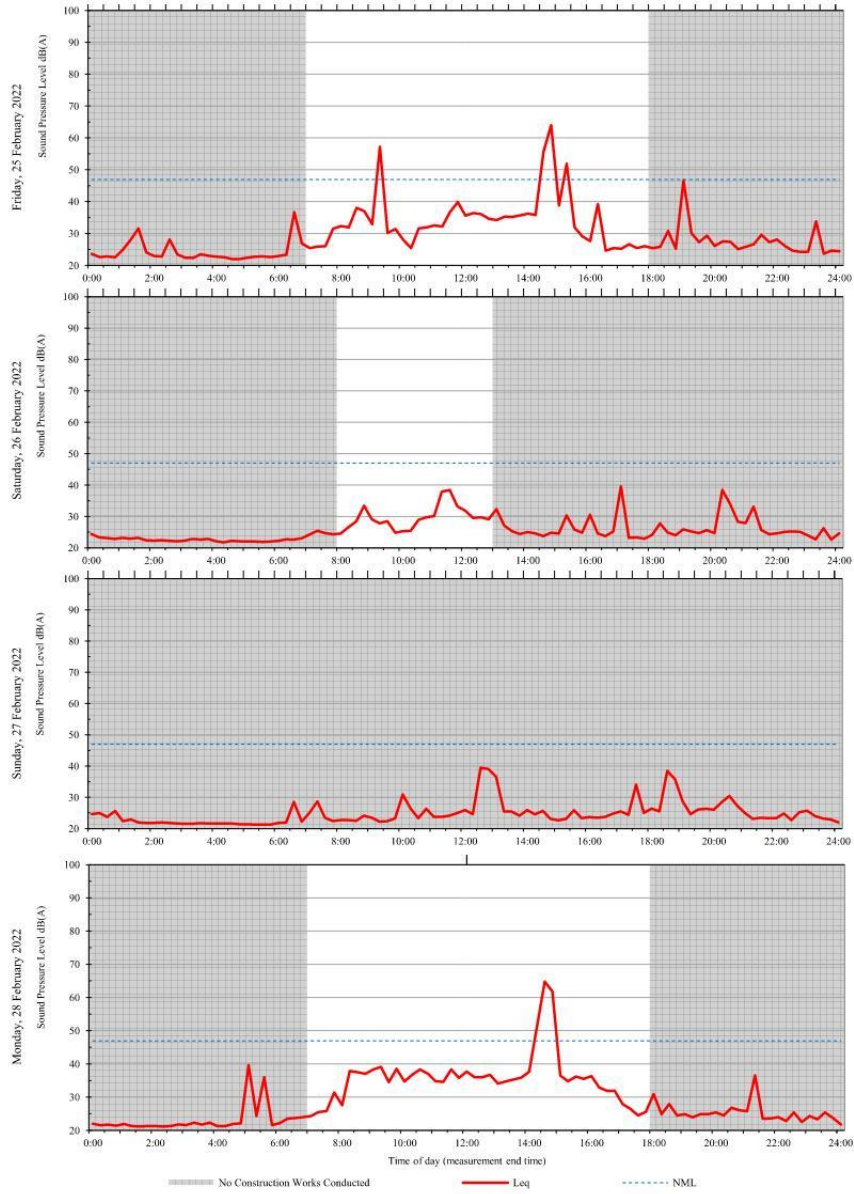



Health Infrastructure

Children's Hospital Westmead

**Vibration Monitoring - KR - Animal
House - February 2022**

CVM/ KR/202202

Issue 1 | 09/03/2022

This report takes into account the particular instructions and requirements of our client.

It is not intended for and should not be relied upon by any third party and no responsibility is undertaken to any third party.

Job number 271985

Arup Pty Ltd ABN 18 000 966 165

Arup Pty Ltd

Level 5

151 Clarence Street

Sydney NSW 2000

Australia




www.arup.com



Document Verification

Project title Children's Hospital Westmead
Document title Monthly Vibration Monitoring Report
Job number 271985
Document ref CVM/KR/202202
File reference -

Revision	Date	Filename	
		Westmead Hospital – 103156 KR - Animal House - Summary of Recent Vibration Measurements (01-02 to 28-02).docx	
Issue 1	09/03/2022	Description	Issue

	Prepared by	Checked by	Approved by
Name	PR	KF	KF
Signature			

Filename	
Description	

	Prepared by	Checked by	Approved by
Name			
Signature			

Filename	
Description	

	Prepared by	Checked by	Approved by
Name			
Signature			

Issue Document Verification with Document

Contents

Executive Summary.....	3
1. Introduction	5
2. Monitor Location	5
3. Recorded Data	6
Appendix A: Calibration Certificates.....	9

Executive Summary

This report summarises the vibration monitoring data recorded at KR - Animal House, over one month – from 01/02/2022 to 28/02/2022. Graphs in this report show the recorded data in blue, and exceedance trigger levels in red.

RMSV Vibration Levels

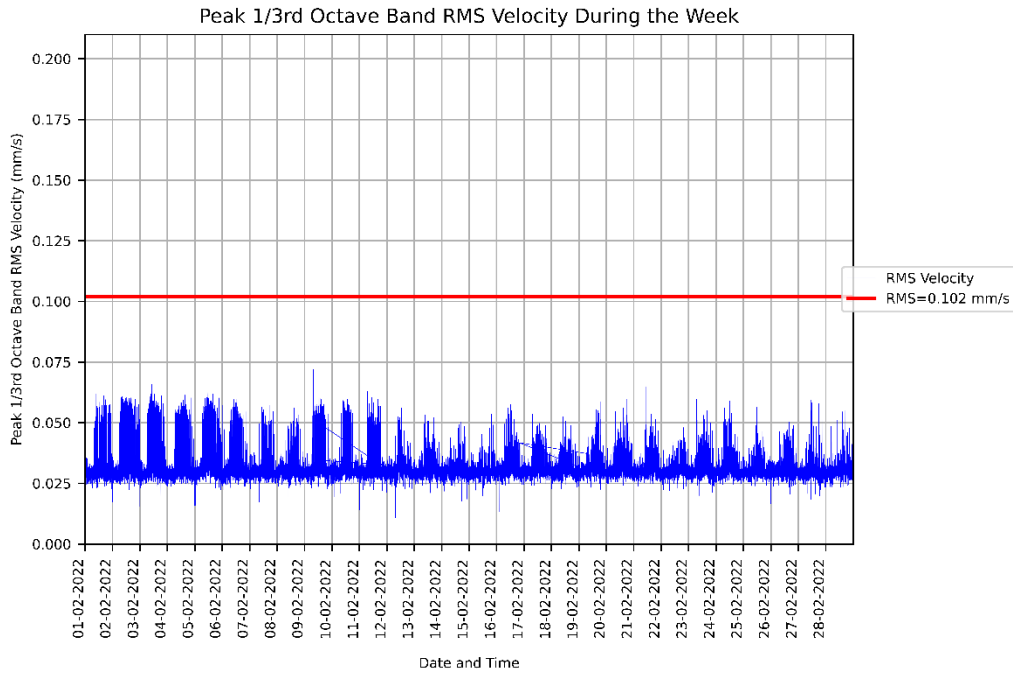


Figure 1: Measured RMSV vibration levels for 01/02/2022 to 28/02/2022 at the KR - Animal House.

The table below summarises the number of Root-Mean-Square Velocity (RMSV) limit exceedances recorded during and outside of construction hours.

During Construction Hours	Outside of Construction Hours
0	0

PPV Vibration Levels

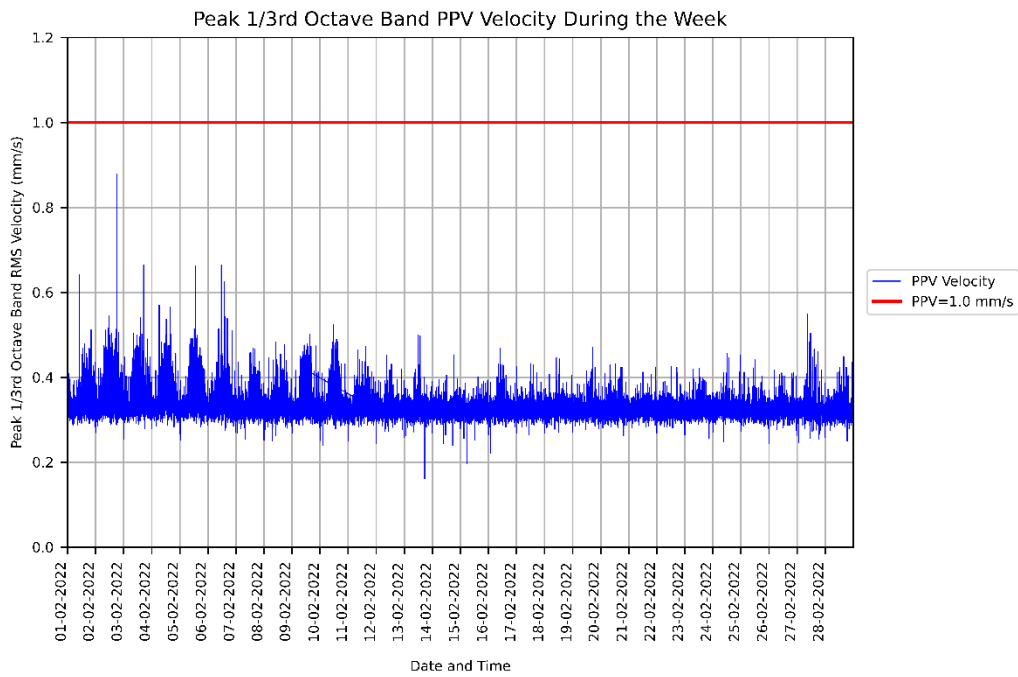


Figure 2: Measured vibration levels for 01/02/2022 to 28/02/2022 at the KR - Animal House.

The table below summarises the number of Peak Particle Velocity (PPV) limit exceedances recorded during and outside of construction hours.

During Construction Hours	Outside of Construction Hours
0	0

1. Introduction

Arup has been commissioned by PricewaterhouseCoopers (PwC) on behalf of NSW Health Infrastructure to monitor vibration levels in facilities adjacent to the Paediatric Services Building and Multi-storey Car Park development sites to ensure facility operations are not excessively impacted by the construction works. This report summarises the vibration monitoring data recorded at KR - Animal House during the period of the 01/02/2022 to 28/02/2022.

For the purposes of reporting, construction works are considered to be occurring at the following times:

Day	Construction Hours
Monday to Friday	7:00am to 6:00pm
Saturday	8:00am to 1:00pm
Sunday	No works
Public Holidays	No works

2. Monitor Location

The location of this monitor is shown below in Figure 3Figure .

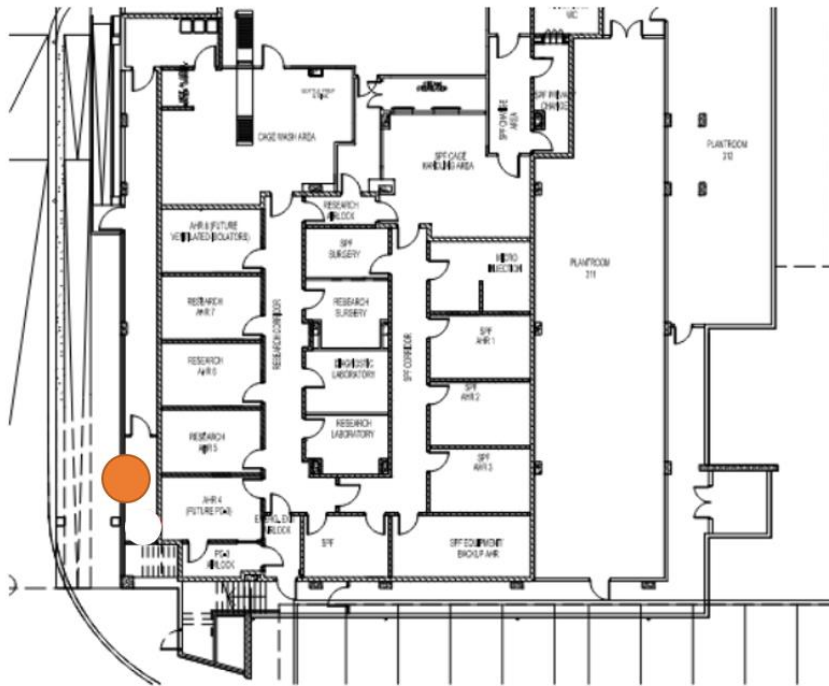


Figure 3: KR - Animal House vibration monitor location shown in orange

Monitoring at this location utilises a GeoSIG GMSplus with a GeoSIG VE-11 geophone. The calibration certificate for the geophone is included in Appendix A.

3. Recorded Data

Figure 4 below shows the vibration levels (RMS velocity) recorded between 01/02/2022 and 28/02/2022. The recorded data is shown in blue, while the limit of 0.102mm/s (V_{RMS}) is shown in red.

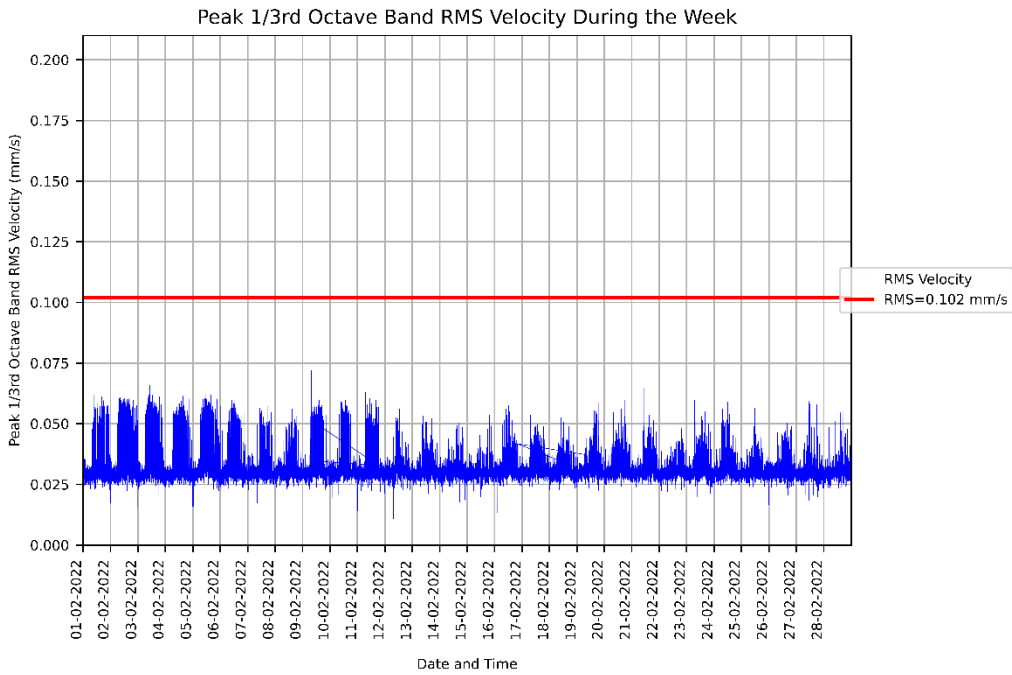


Figure 4: Measured RMSV vibration levels for 01/02/2022 to 28/02/2022 at the KR - Animal House.

The table below summarises the number of RMS Velocity limit exceedances recorded during and outside of construction hours.

During Construction Hours	Outside of Construction Hours
0	0

Figure 5 below shows the peak particle vibration levels (PPV velocity) recorded between 01/02/2022 and 28/02/2022. The recorded data is shown in blue, while the limit of 1.0mm/s (V_{PPV}) is shown in red.

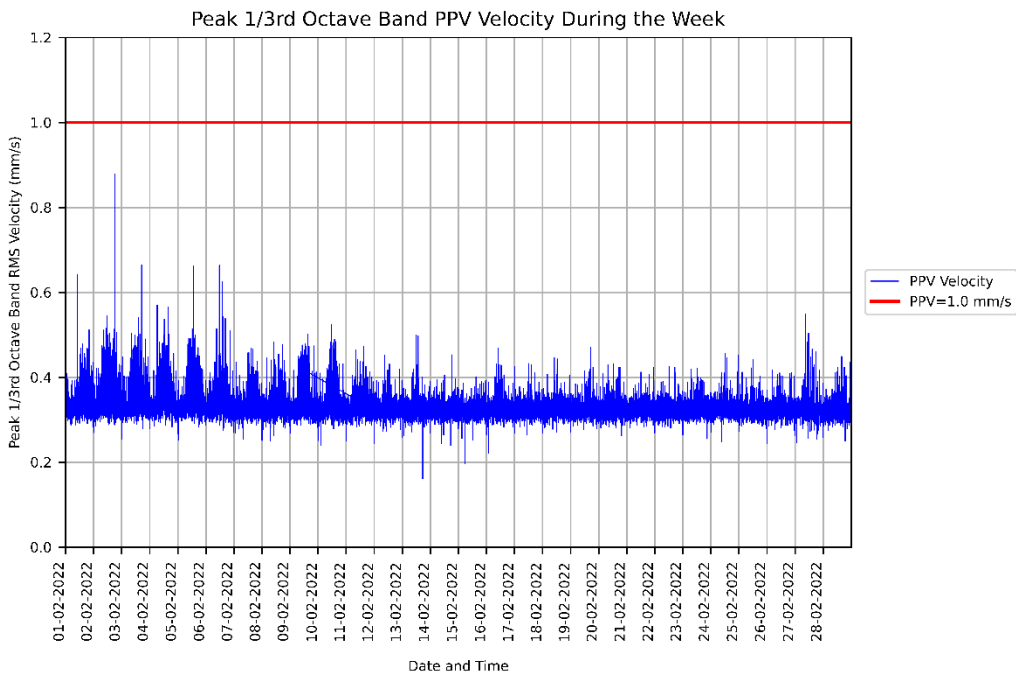


Figure 5: Measured PPV vibration levels for 01/02/2022 to 28/02/2022 at the KR - Animal House.

The table below summarises the number of PPV limit exceedances recorded during and outside of construction hours.

During Construction Hours	Outside of Construction Hours
0	0

Frequency response and linearity characteristics for
GeoSIG Velocity Geophone **VE-11** Serial No. **55908**
Constant velocity of 10 mm/sec Peak applied for response
(Except at 200.0 Hz where applied level limited to 1.0 mm/s peak)
For amplitude linearity applied level varied at 15.92 Hz

12VDC Power Supply

Geophone Orientation.: Vertical

Frequency		Velocity mm/sec Peak	Indicated Sensitivity mV/mm s^{-1} Vertical Sensitivity	Expanded uncertainty $U_{95} \%$
Hz	Radians/sec			
3.00	18.85	10.0	110.73	1.00%
4.00	25.13	10.0	110.65	0.90%
6.00	37.70	10.0	107.04	0.90%
10.00	62.83	10.0	101.63	0.90%
15.00	94.25	10.0	99.12	0.90%
15.92	94.25	1.0	N/A	0.90%
15.92	94.25	5.0	93.34	0.90%
15.92	94.25	10.0	93.15	0.90%
15.92	94.25	50.0	93.10	0.90%
15.92	94.25	100	N/A	0.50%
30.00	188.50	10.0	97.57	0.50%
60.00	376.99	10.0	98.58	0.50%
120.00	753.98	10.0	110.55	0.50%
150.00	942.48	10.0	125.20	0.50%
Hz	Radians/sec	Velocity mm/sec Peak	Vertical Sensitivity	$U_{95} \%$

Note1:

The laboratory has accreditation under ISO/IEC 17025 from NATA for calibration to ISO 16063-21 at frequencies from 0.5 Hz. Measurements at all frequencies and levels shown in the table above are made using reference equipment traceably calibrated to Australian National Standards.

Note2:

The uncertainties quoted are estimated at a confidence level of 95% and a coverage factor of $k=2$ applies unless otherwise stated.



Health Infrastructure

Children's Hospital Westmead

**Vibration Monitoring - CHW - L1 Lab -
February 2022**

CVM/ CHW/202202

Issue 1 | 09/03/2022

This report takes into account the particular instructions and requirements of our client.

It is not intended for and should not be relied upon by any third party and no responsibility is undertaken to any third party.

Job number 271985

Arup Pty Ltd ABN 18 000 966 165

Arup Pty Ltd

Level 5

151 Clarence Street

Sydney NSW 2000

Australia




www.arup.com



Document Verification

Project title Children's Hospital Westmead
Document title Monthly Vibration Monitoring Report
Job number 271985
Document ref CVM/CHW/202202
File reference -

Revision	Date	Filename	
		Westmead Hospital – 103157 CHW - L1 Lab - Summary of Recent Vibration Measurements (01-02 to 28-02).docx	
Issue 1	09/03/2022	Description	Issue

	Prepared by	Checked by	Approved by
Name	PR	KF	KF
Signature			

Filename	
Description	

	Prepared by	Checked by	Approved by
Name			
Signature			

Filename	
Description	

	Prepared by	Checked by	Approved by
Name			
Signature			

Issue Document Verification with Document

Contents

Executive Summary.....	3
1. Introduction	4
2. Monitor Location	4
3. Recorded Data	5
Appendix A: Calibration Certificates.....	6

Executive Summary

This report summarises the vibration monitoring data recorded at CHW - L1 Lab, over one month – from 01/02/2022 to 28/02/2022. Graphs in this report show the recorded data in blue, and exceedance trigger levels in red.

RMSV Vibration Levels

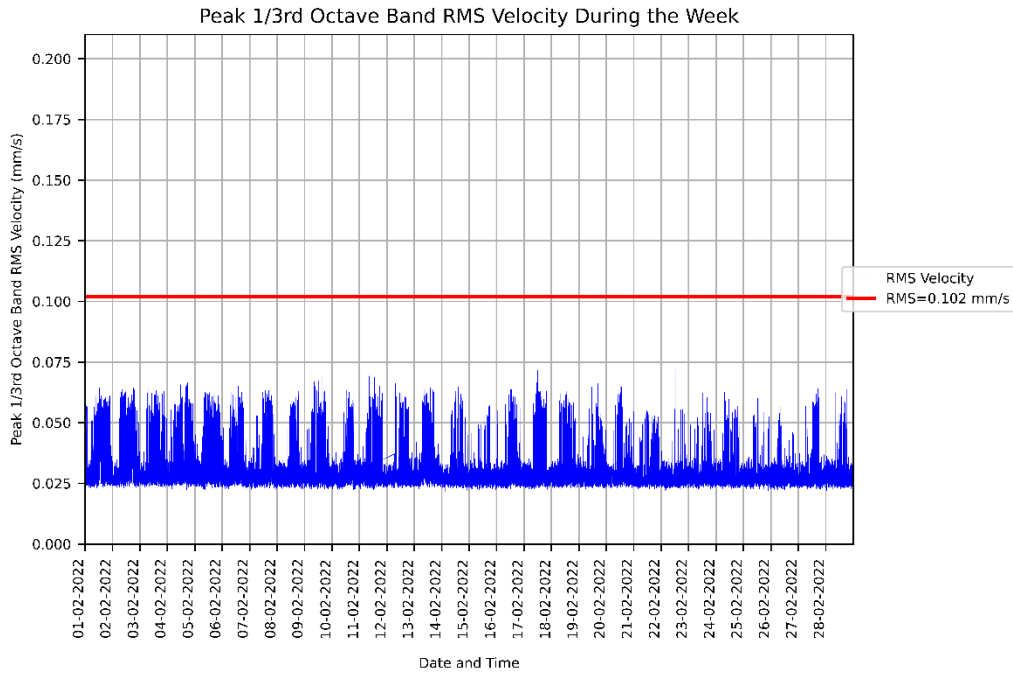


Figure 1: Measured RMSV vibration levels for 01/02/2022 to 28/02/2022 at the CHW - L1 Lab.

The table below summarises the number of Root-Mean-Square Velocity (RMSV) limit exceedances recorded during and outside of construction hours.

During Construction Hours	Outside of Construction Hours
0	0

1. Introduction

Arup has been commissioned by PricewaterhouseCoopers (PwC) on behalf of NSW Health Infrastructure to monitor vibration levels in facilities adjacent to the Paediatric Services Building and Multi-storey Car Park development sites to ensure facility operations are not excessively impacted by the construction works. This report summarises the vibration monitoring data recorded at CHW - L1 Lab during the period of the 01/02/2022 to 28/02/2022.

For the purposes of reporting, construction works are considered to be occurring at the following times:

Day	Construction Hours
Monday to Friday	7:00am to 6:00pm
Saturday	8:00am to 1:00pm
Sunday	No works
Public Holidays	No works

2. Monitor Location

The location of this monitor is shown below in Figure 2.

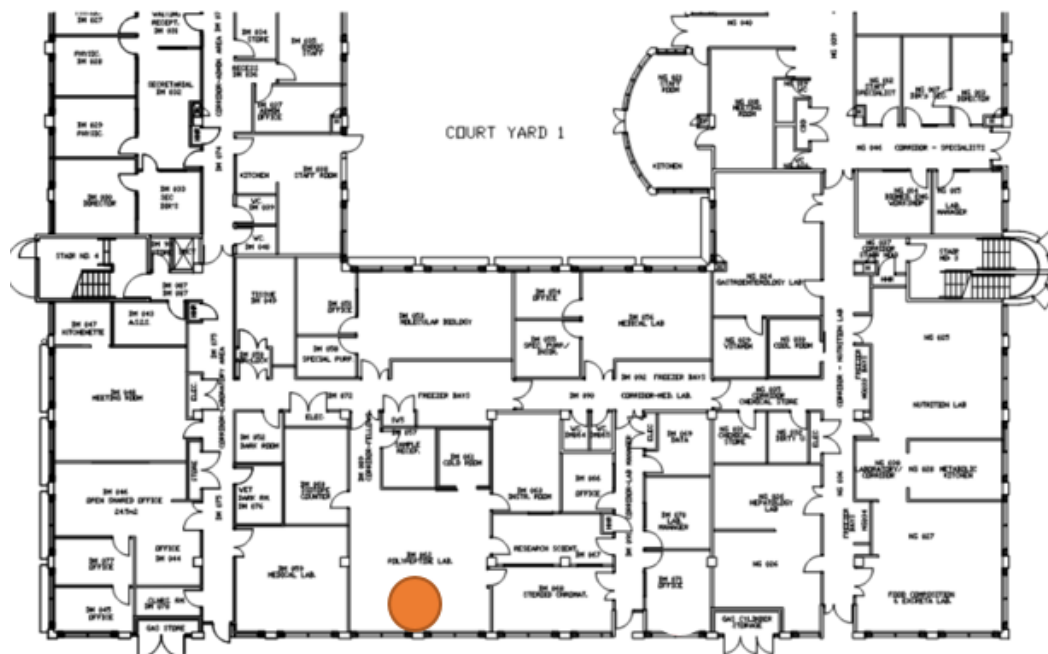


Figure 2: CHW - L1 Lab vibration monitor location shown in orange

Monitoring at this location utilises a GeoSIG GMSplus with a GeoSIG VE-11 geophone. The calibration certificate for the geophone is included in Appendix A.

3. Recorded Data

Figure 3 below shows the vibration levels (RMS velocity) recorded between 01/02/2022 and 28/02/2022. The recorded data is shown in blue, while the limit of 0.102mm/s (V_{RMS}) is shown in red.

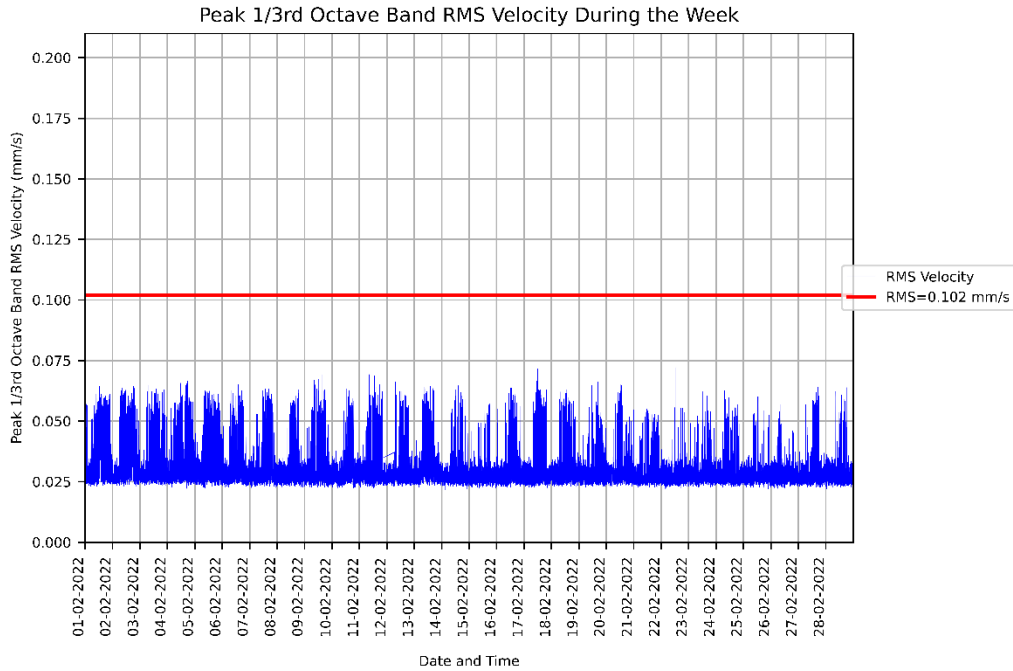


Figure 3: Measured RMSV vibration levels for 01/02/2022 to 28/02/2022 at the CHW - L1 Lab.

The table below summarises the number of RMS Velocity limit exceedances recorded during and outside of construction hours.

During Construction Hours	Outside of Construction Hours
0	0

Appendix A: Calibration Certificates



Frequency response and linearity characteristics for
GeoSIG Velocity Geophone **VE-11** Serial No. **55910**
Constant velocity of 10 mm/sec Peak applied for response
(Except at 200.0 Hz where applied level limited to 1.0 mm/s peak)
For amplitude linearity applied level varied at 15.92 Hz

12VDC Power Supply

Geophone Orientation.: Vertical

Frequency		Velocity mm/sec Peak	Indicated Sensitivity $\text{mV}/\text{mms}^{-1}$	Expanded uncertainty
Hz	Radians/sec		Vertical Sensitivity	U_{95} %
3.00	18.85	10.0	109.76	1.00%
4.00	25.13	10.0	111.50	0.90%
6.00	37.70	10.0	108.98	0.90%
10.00	62.83	10.0	103.80	0.90%
15.00	94.25	10.0	101.12	0.90%
15.92	94.25	1.0	N/A	0.90%
15.92	94.25	5.0	95.09	0.90%
15.92	94.25	10.0	94.96	0.90%
15.92	94.25	50.0	94.83	0.90%
15.92	94.25	100	N/A	0.50%
30.00	188.50	10.0	99.03	0.50%
60.00	376.99	10.0	100.56	0.50%
120.00	753.98	10.0	113.91	0.50%
150.00	942.48	10.0	119.09	0.50%
Hz	Radians/sec	Velocity mm/sec Peak	Vertical Sensitivity	U_{95} %

Note1:

The laboratory has accreditation under ISO/IEC 17025 from NATA for calibration to ISO 16063-21 at frequencies from 0.5 Hz. Measurements at all frequencies and levels shown in the table above are made using reference equipment traceably calibrated to Australian National Standards.

Note2:

The uncertainties quoted are estimated at a confidence level of 95% and a coverage factor of $k=2$ applies unless otherwise stated.



Health Infrastructure

Children's Hospital Westmead

**Vibration Monitoring - CASB Level 2
MRI - February 2022**

CVM/ CASB/202202

Issue 1 | 09/03/2022

This report takes into account the particular instructions and requirements of our client.

It is not intended for and should not be relied upon by any third party and no responsibility is undertaken to any third party.

Job number 271985

Arup Pty Ltd ABN 18 000 966 165

Arup Pty Ltd

Level 5

151 Clarence Street

Sydney NSW 2000

Australia




www.arup.com



Document Verification

Project title Children's Hospital Westmead
Document title Monthly Vibration Monitoring Report
Job number 271985
Document ref CVM/CASB/202202
File reference -

Revision	Date	Filename	
		Westmead Hospital – 103158 CASB Level 2 MRI - Summary of Recent Vibration Measurements (01-02 to 28-02).docx	
Issue 1	09/03/2022	Description	Issue

	Prepared by	Checked by	Approved by
Name	PR	KF	KF
Signature			

Filename
Description

	Prepared by	Checked by	Approved by
Name			
Signature			

Filename
Description

	Prepared by	Checked by	Approved by
Name			
Signature			

Issue Document Verification with Document

Contents

Executive Summary.....	3
1. Introduction	4
2. Monitor Location	4
3. Recorded Data	5
Appendix A: Calibration Certificates.....	6

Executive Summary

This report summarises the vibration monitoring data recorded at CASB Level 2 MRI, over one month – from 01/02/2022 to 28/02/2022. Graphs in this report show the recorded data in blue, and exceedance trigger levels in red.

RMSV Vibration Levels

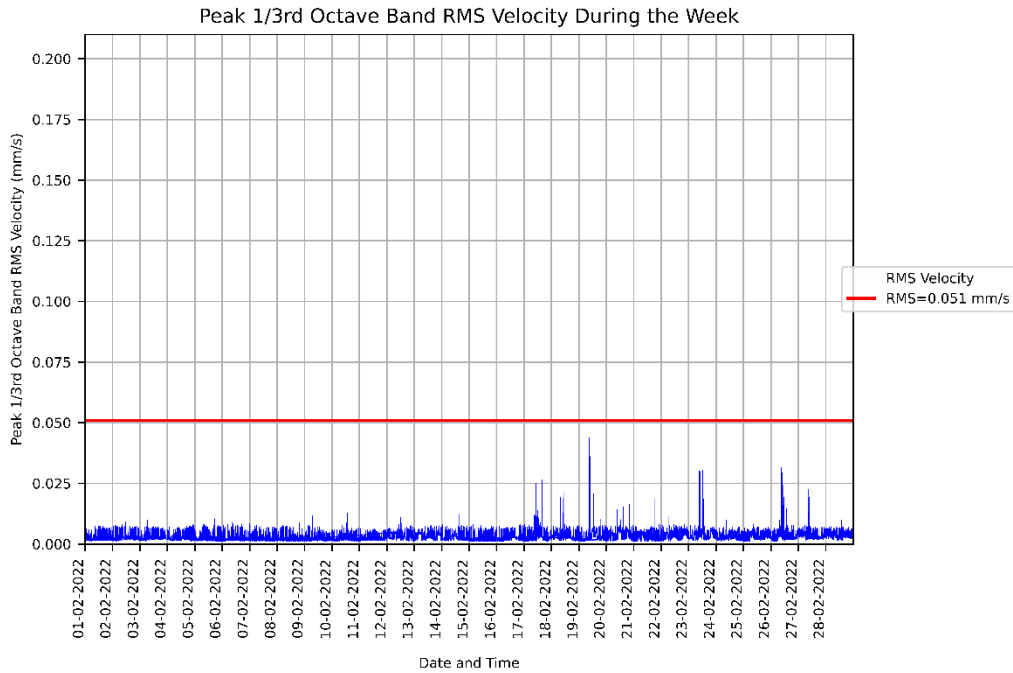


Figure 1: Measured RMSV vibration levels for 01/02/2022 to 28/02/2022 at the CASB Level 2 MRI.

The table below summarises the number of Root-Mean-Square Velocity (RMSV) limit exceedances recorded during and outside of construction hours.

During Construction Hours	Outside of Construction Hours
0	0

3. Recorded Data

Figure 3 below shows the vibration levels (RMS velocity) recorded between 01/02/2022 and 28/02/2022. The recorded data is shown in blue, while the limit of 0.051mm/s (V_{RMS}) is shown in red.

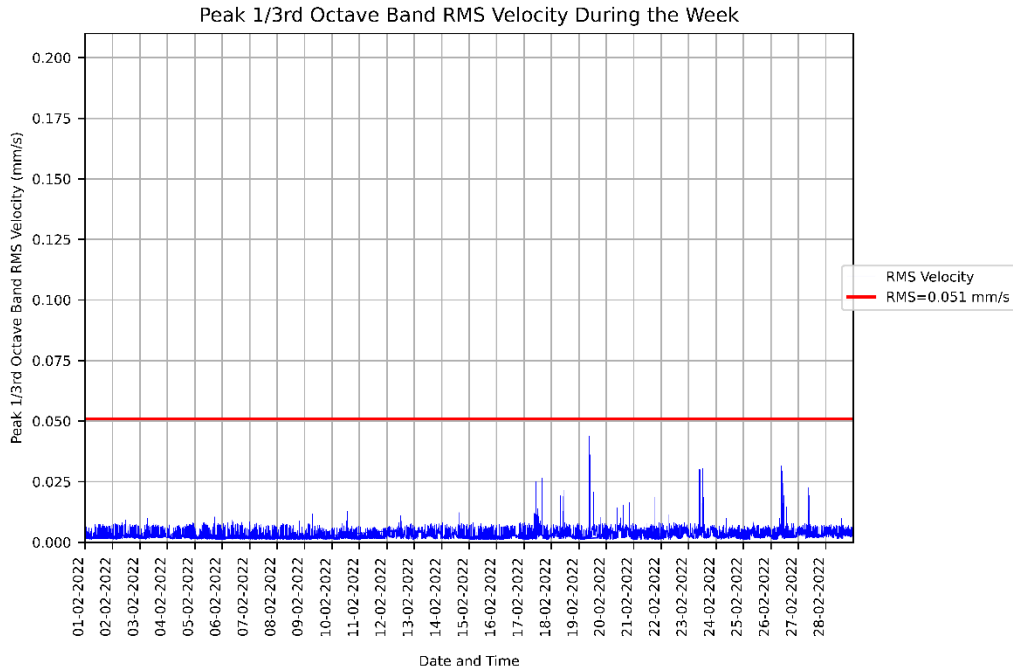


Figure 3: Measured RMSV vibration levels for 01/02/2022 to 28/02/2022 at the CASB Level 2 MRI.

The table below summarises the number of RMS Velocity limit exceedances recorded during and outside of construction hours.

During Construction Hours	Outside of Construction Hours
0	0

Frequency response and linearity characteristics for
GeoSIG Velocity Geophone **VE-11** Serial No. **55911**
Constant velocity of 10 mm/sec Peak applied for response
(Except at 200.0 Hz where applied level limited to 1.0 mm/s peak)
For amplitude linearity applied level varied at 15.92 Hz

12VDC Power Supply

Geophone Orientation.: Vertical

Frequency		Velocity mm/sec Peak	Indicated Sensitivity $\text{mV}/\text{mms}^{-1}$	Expanded uncertainty
Hz	Radians/sec		Vertical Sensitivity	U_{95} %
3.00	18.85	10.0	112.66	1.00%
4.00	25.13	10.0	112.97	0.90%
6.00	37.70	10.0	108.80	0.90%
10.00	62.83	10.0	101.91	0.90%
15.00	94.25	10.0	98.58	0.90%
15.92	94.25	1.0	N/A	0.90%
15.92	94.25	5.0	92.57	0.90%
15.92	94.25	10.0	92.49	0.90%
15.92	94.25	50.0	92.48	0.90%
15.92	94.25	100	N/A	0.50%
30.00	188.50	10.0	95.98	0.50%
60.00	376.99	10.0	96.13	0.50%
120.00	753.98	10.0	106.11	0.50%
150.00	942.48	10.0	116.46	0.50%
Hz	Radians/sec	Velocity mm/sec Peak	Vertical Sensitivity	U_{95} %

Note1:

The laboratory has accreditation under ISO/IEC 17025 from NATA for calibration to ISO 16063-21 at frequencies from 0.5 Hz. Measurements at all frequencies and levels shown in the table above are made using reference equipment traceably calibrated to Australian National Standards.

Note2:

The uncertainties quoted are estimated at a confidence level of 95% and a coverage factor of $k=2$ applies unless otherwise stated.



Health Infrastructure

Children's Hospital Westmead

**Vibration Monitoring - CASB level 3
Surgical Suite - February 2022**

CVM/ CASB/202202

Issue 1 | 09/03/2022

This report takes into account the particular instructions and requirements of our client.

It is not intended for and should not be relied upon by any third party and no responsibility is undertaken to any third party.

Job number 271985

Arup Pty Ltd ABN 18 000 966 165

Arup Pty Ltd
Level 5
151 Clarence Street
Sydney NSW 2000
Australia
www.arup.com






Document Verification

Project title Children's Hospital Westmead
Document title Monthly Vibration Monitoring Report
Job number 271985
Document ref CVM/CASB/202202
File reference -

Revision	Date	Filename	
		Westmead Hospital – 103160 CASB level 3 Surgical Suite - Summary of Recent Vibration Measurements (01-02 to 28-02).docx	

Issue 1 09/03/2022 **Description** Issue

	Prepared by	Checked by	Approved by
Name	PR	KF	KF
Signature			

Filename
Description

	Prepared by	Checked by	Approved by
Name			
Signature			

Filename
Description

	Prepared by	Checked by	Approved by
Name			
Signature			

Issue Document Verification with Document

Contents

Executive Summary.....	3
1. Introduction	4
2. Monitor Location	4
3. Recorded Data	5
Appendix A: Calibration Certificates.....	7

Executive Summary

This report summarises the vibration monitoring data recorded at CASB level 3 Surgical Suite, over one month – from 01/02/2022 to 28/02/2022. Graphs in this report show the recorded data in blue, and exceedance trigger levels in red.

RMSV Vibration Levels

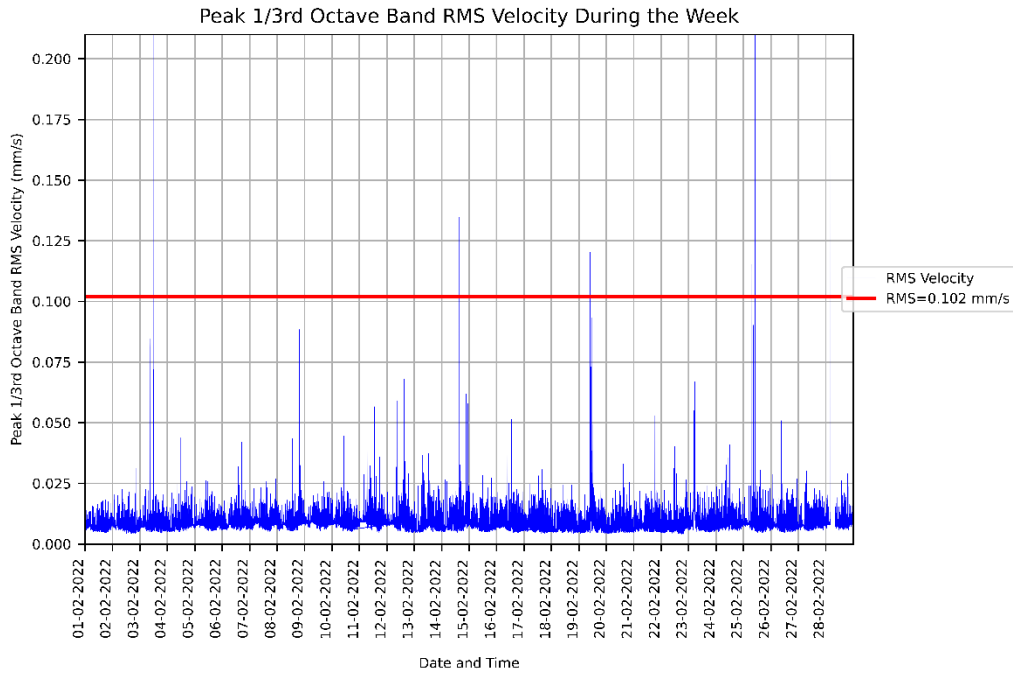


Figure 1: Measured RMSV vibration levels for 01/02/2022 to 28/02/2022 at the CASB level 3 Surgical Suite.

The table below summarises the number of Root-Mean-Square Velocity (RMSV) limit exceedances recorded during and outside of construction hours.

During Construction Hours	Outside of Construction Hours
37	86

1. Introduction

Arup has been commissioned by PricewaterhouseCoopers (PwC) on behalf of NSW Health Infrastructure to monitor vibration levels in facilities adjacent to the Paediatric Services Building and Multi-storey Car Park development sites to ensure facility operations are not excessively impacted by the construction works. This report summarises the vibration monitoring data recorded at CASB level 3 Surgical Suite during the period of the 01/02/2022 to 28/02/2022.

For the purposes of reporting, construction works are considered to be occurring at the following times:

Day	Construction Hours
Monday to Friday	7:00am to 6:00pm
Saturday	8:00am to 1:00pm
Sunday	No works
Public Holidays	No works

2. Monitor Location

The location of this monitor is shown below in Figure 2.

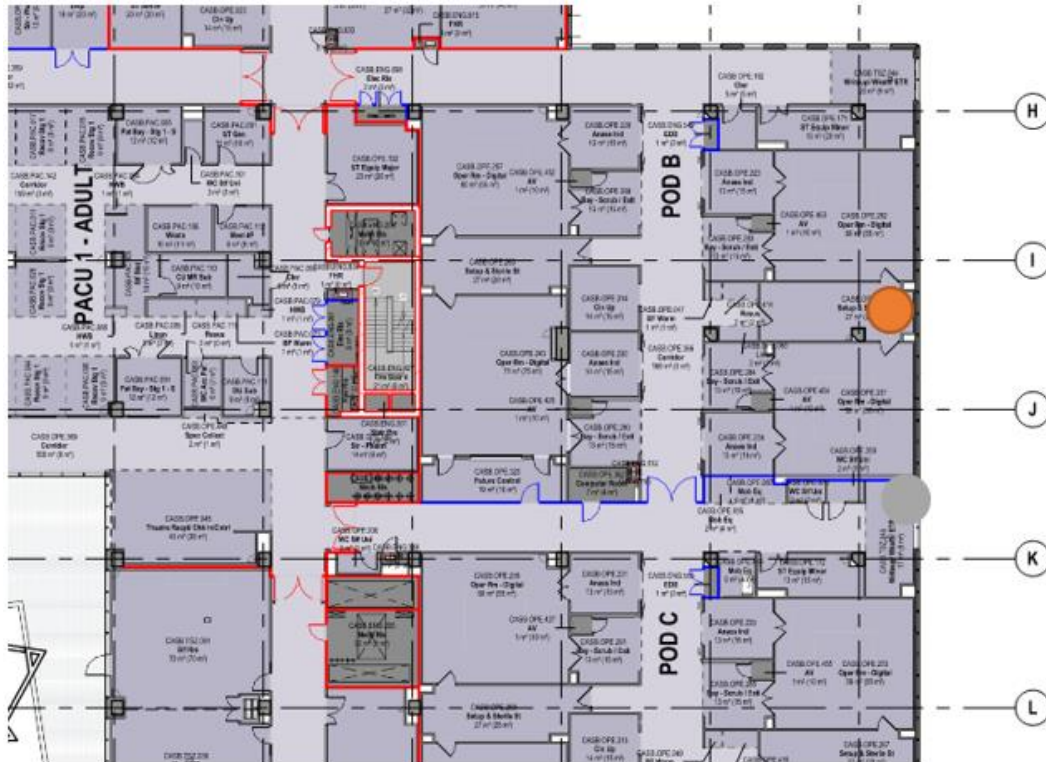


Figure 2: CASB level 3 Surgical Suite vibration monitor location shown in orange
Monitoring at this location utilises a GeoSIG GMSplus with a GeoSIG VE-11 geophone. The calibration certificate for the geophone is included in Appendix A.

3. Recorded Data

Figure 3 below shows the vibration levels (RMS velocity) recorded between 01/02/2022 and 28/02/2022. The recorded data is shown in blue, while the limit of 0.102mm/s (V_{RMS}) is shown in red.

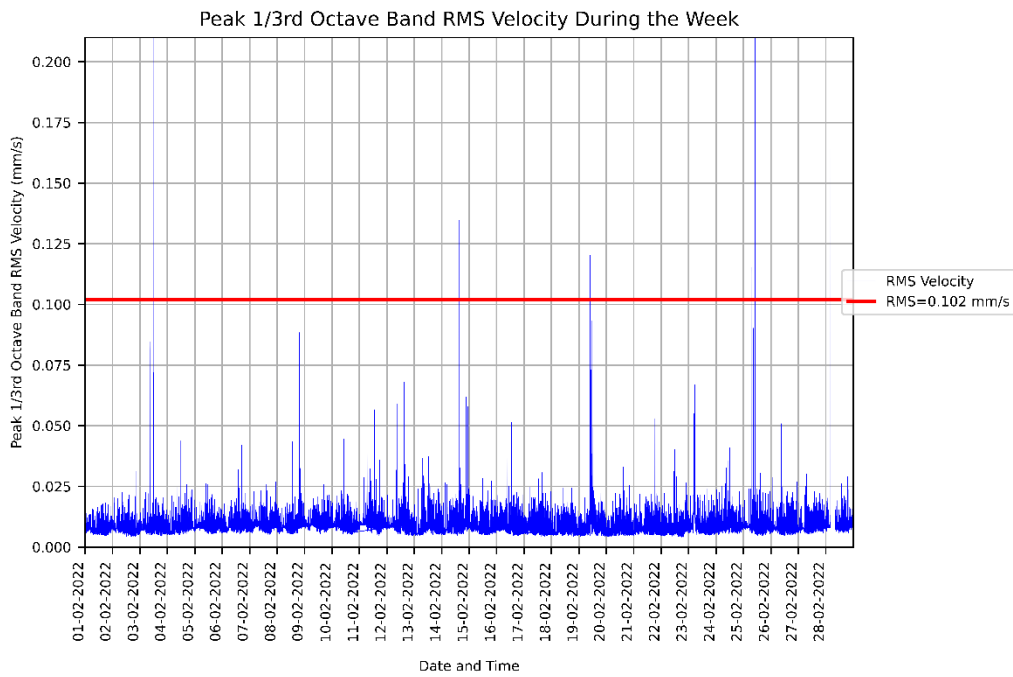


Figure 3: Measured RMSV vibration levels for 01/02/2022 to 28/02/2022 at the CASB level 3 Surgical Suite.

The table below summarises the number of RMS Velocity limit exceedances recorded during and outside of construction hours.

During Construction Hours	Outside of Construction Hours
37	86

Appendix A: Calibration Certificates

Frequency response and linearity characteristics for
 GeoSIG Velocity Geophone **VE-11** Serial No. **55912**
 Constant velocity of 10 mm/sec Peak applied for response
 (Except at 200.0 Hz where applied level limited to 1.0 mm/s peak)
 For amplitude linearity applied level varied at 15.92 Hz

12VDC Power Supply

Geophone Orientation.: Vertical

Frequency		Velocity mm/sec Peak	Indicated Sensitivity mV/mms ⁻¹ Vertical Sensitivity	Expanded uncertainty U ₉₅ %
Hz	Radians/sec			
3.00	18.85	10.0	112.74	1.00%
4.00	25.13	10.0	113.82	0.90%
6.00	37.70	10.0	109.59	0.90%
10.00	62.83	10.0	100.79	0.90%
15.00	94.25	10.0	96.12	0.90%
15.92	94.25	1.0	N/A	0.90%
15.92	94.25	5.0	90.09	0.90%
15.92	94.25	10.0	89.99	0.90%
15.92	94.25	50.0	89.89	0.90%
15.92	94.25	100	N/A	0.50%
30.00	188.50	10.0	92.45	0.50%
60.00	376.99	10.0	92.89	0.50%
120.00	753.98	10.0	100.92	0.50%
150.00	942.48	10.0	117.80	0.50%
Hz	Radians/sec	Velocity mm/sec Peak	Vertical Sensitivity	U ₉₅ %

Note1:

The laboratory has accreditation under ISO/IEC 17025 from NATA for calibration to ISO 16063-21 at frequencies from 0.5 Hz. Measurements at all frequencies and levels shown in the table above are made using reference equipment traceably calibrated to Australian National Standards.

Note2:

The uncertainties quoted are estimated at a confidence level of 95% and a coverage factor of k=2 applies unless otherwise stated.

Frequency response and linearity characteristics for
GeoSIG Velocity Geophone **VE-11** Serial No. **55910**
Constant velocity of 10 mm/sec Peak applied for response
(Except at 200.0 Hz where applied level limited to 1.0 mm/s peak)
For amplitude linearity applied level varied at 15.92 Hz

12VDC Power Supply

Geophone Orientation.: Vertical

Frequency		Velocity mm/sec Peak	Indicated Sensitivity mV/mms ⁻¹	Expanded uncertainty
Hz	Radians/sec		Vertical Sensitivity	U ₉₅ %
3.00	18.85	10.0	109.76	1.00%
4.00	25.13	10.0	111.50	0.90%
6.00	37.70	10.0	108.98	0.90%
10.00	62.83	10.0	103.80	0.90%
15.00	94.25	10.0	101.12	0.90%
15.92	94.25	1.0	N/A	0.90%
15.92	94.25	5.0	95.09	0.90%
15.92	94.25	10.0	94.96	0.90%
15.92	94.25	50.0	94.83	0.90%
15.92	94.25	100	N/A	0.50%
30.00	188.50	10.0	99.03	0.50%
60.00	376.99	10.0	100.56	0.50%
120.00	753.98	10.0	113.91	0.50%
150.00	942.48	10.0	119.09	0.50%
Hz	Radians/sec	Velocity mm/sec Peak	Vertical Sensitivity	U ₉₅ %

Note1:

The laboratory has accreditation under ISO/IEC 17025 from NATA for calibration to ISO 16063-21 at frequencies from 0.5 Hz. Measurements at all frequencies and levels shown in the table above are made using reference equipment traceably calibrated to Australian National Standards.

Note2:

The uncertainties quoted are estimated at a confidence level of 95% and a coverage factor of k=2 applies unless otherwise stated.



Health Infrastructure

Children's Hospital Westmead

**Vibration Monitoring - KR - L4 Lab 9 -
February 2022**

CVM/ KR/202202

Issue 1 | 09/03/2022

This report takes into account the particular instructions and requirements of our client.

It is not intended for and should not be relied upon by any third party and no responsibility is undertaken to any third party.

Job number 271985

Arup Pty Ltd ABN 18 000 966 165

Arup Pty Ltd

Level 5

151 Clarence Street

Sydney NSW 2000

Australia




www.arup.com



Document Verification

Project title Children's Hospital Westmead
Document title Monthly Vibration Monitoring Report
Job number 271985
Document ref CVM/KR/202202
File reference -

Revision	Date	Filename	
		Westmead Hospital – 103161 KR - L4 Lab 9 - Summary of Recent Vibration Measurements (01-02 to 28-02).docx	
Issue 1	09/03/2022	Description	Issue

	Prepared by	Checked by	Approved by
Name	PR	KF	KF
Signature			

Filename	
Description	

	Prepared by	Checked by	Approved by
Name			
Signature			

Filename	
Description	

	Prepared by	Checked by	Approved by
Name			
Signature			

Issue Document Verification with Document

Contents

Executive Summary.....	3
1. Introduction	4
2. Monitor Location	4
3. Recorded Data	5
Appendix A: Calibration Certificates.....	7

Executive Summary

This report summarises the vibration monitoring data recorded at KR - L4 Lab 9, over one month – from 01/02/2022 to 28/02/2022. Graphs in this report show the recorded data in blue, and exceedance trigger levels in red.

RMSV Vibration Levels

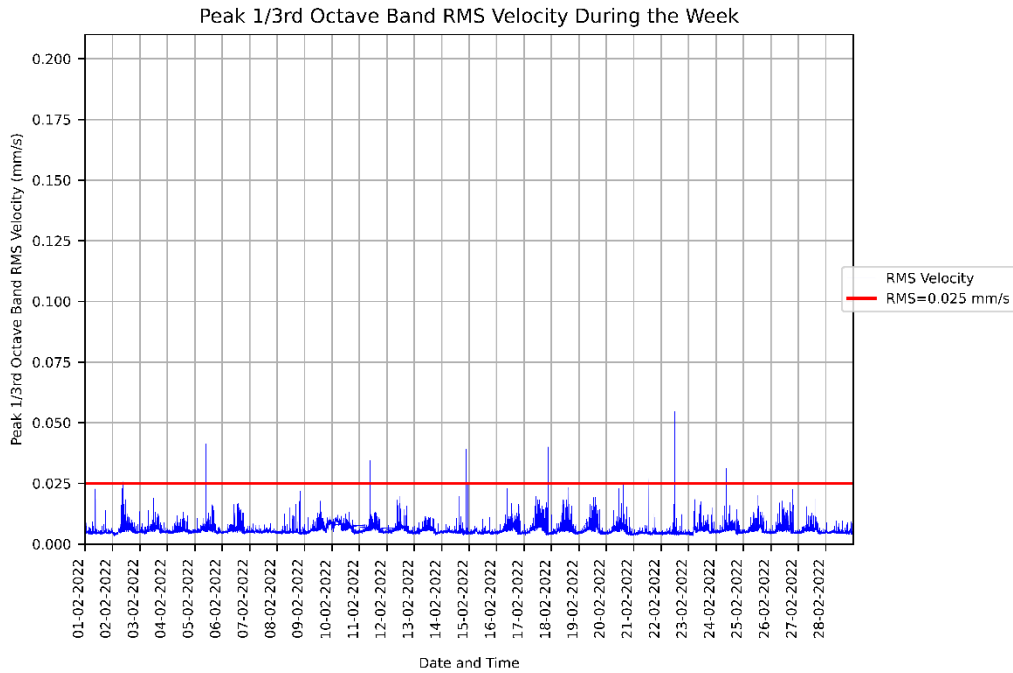


Figure 1: Measured RMSV vibration levels for 01/02/2022 to 28/02/2022 at the KR - L4 Lab 9.

The table below summarises the number of Root-Mean-Square Velocity (RMSV) limit exceedances recorded during and outside of construction hours.

During Construction Hours	Outside of Construction Hours
7	5

1. Introduction

Arup has been commissioned by PricewaterhouseCoopers (PwC) on behalf of NSW Health Infrastructure to monitor vibration levels in facilities adjacent to the Paediatric Services Building and Multi-storey Car Park development sites to ensure facility operations are not excessively impacted by the construction works. This report summarises the vibration monitoring data recorded at KR - L4 Lab 9 during the period of the 01/02/2022 to 28/02/2022.

For the purposes of reporting, construction works are considered to be occurring at the following times:

Day	Construction Hours
Monday to Friday	7:00am to 6:00pm
Saturday	8:00am to 1:00pm
Sunday	No works
Public Holidays	No works

2. Monitor Location

The location of this monitor is shown below in Figure 2.

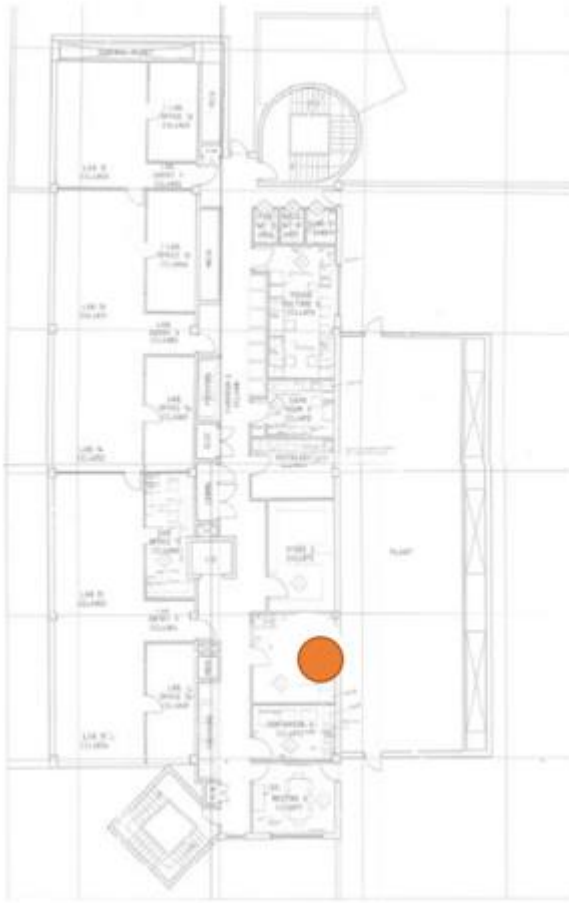


Figure 2: KR - L4 Lab 9 vibration monitor location shown in orange

Monitoring at this location utilises a GeoSIG GMSplus with a GeoSIG VE-11 geophone. The calibration certificate for the geophone is included in Appendix A.

3. Recorded Data

Figure 3 below shows the vibration levels (RMS velocity) recorded between 01/02/2022 and 28/02/2022. The recorded data is shown in blue, while the limit of 0.025mm/s (V_{RMS}) is shown in red.


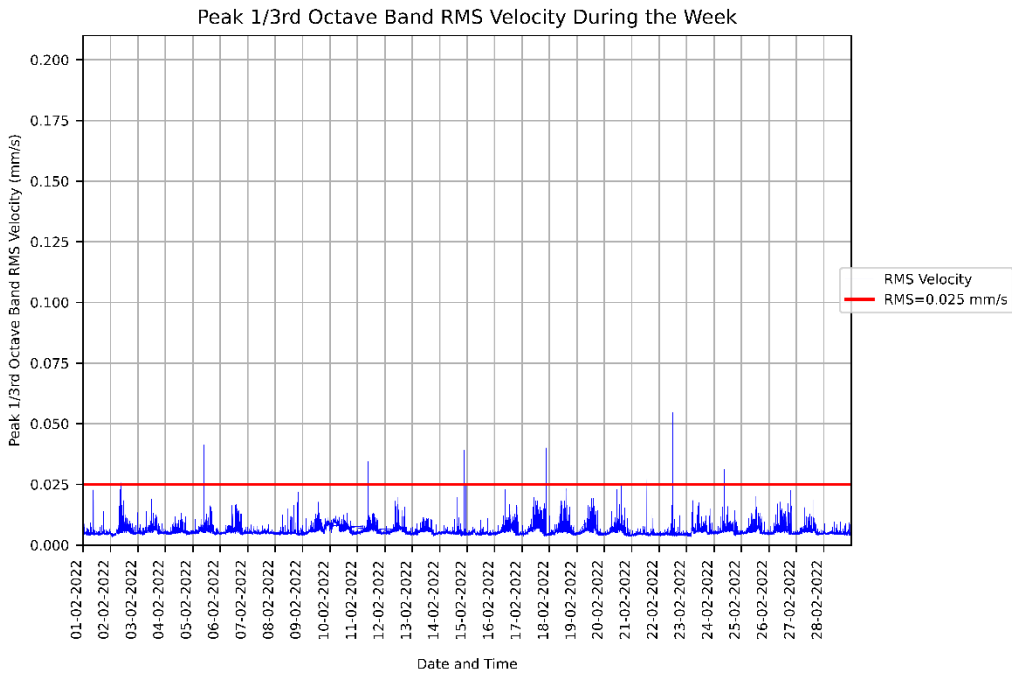


Figure 3: Measured RMSV vibration levels for 01/02/2022 to 28/02/2022 at the KR - L4 Lab 9.

The table below summarises the number of RMS Velocity limit exceedances recorded during and outside of construction hours.

During Construction Hours	Outside of Construction Hours
7	5

Appendix A: Calibration Certificates

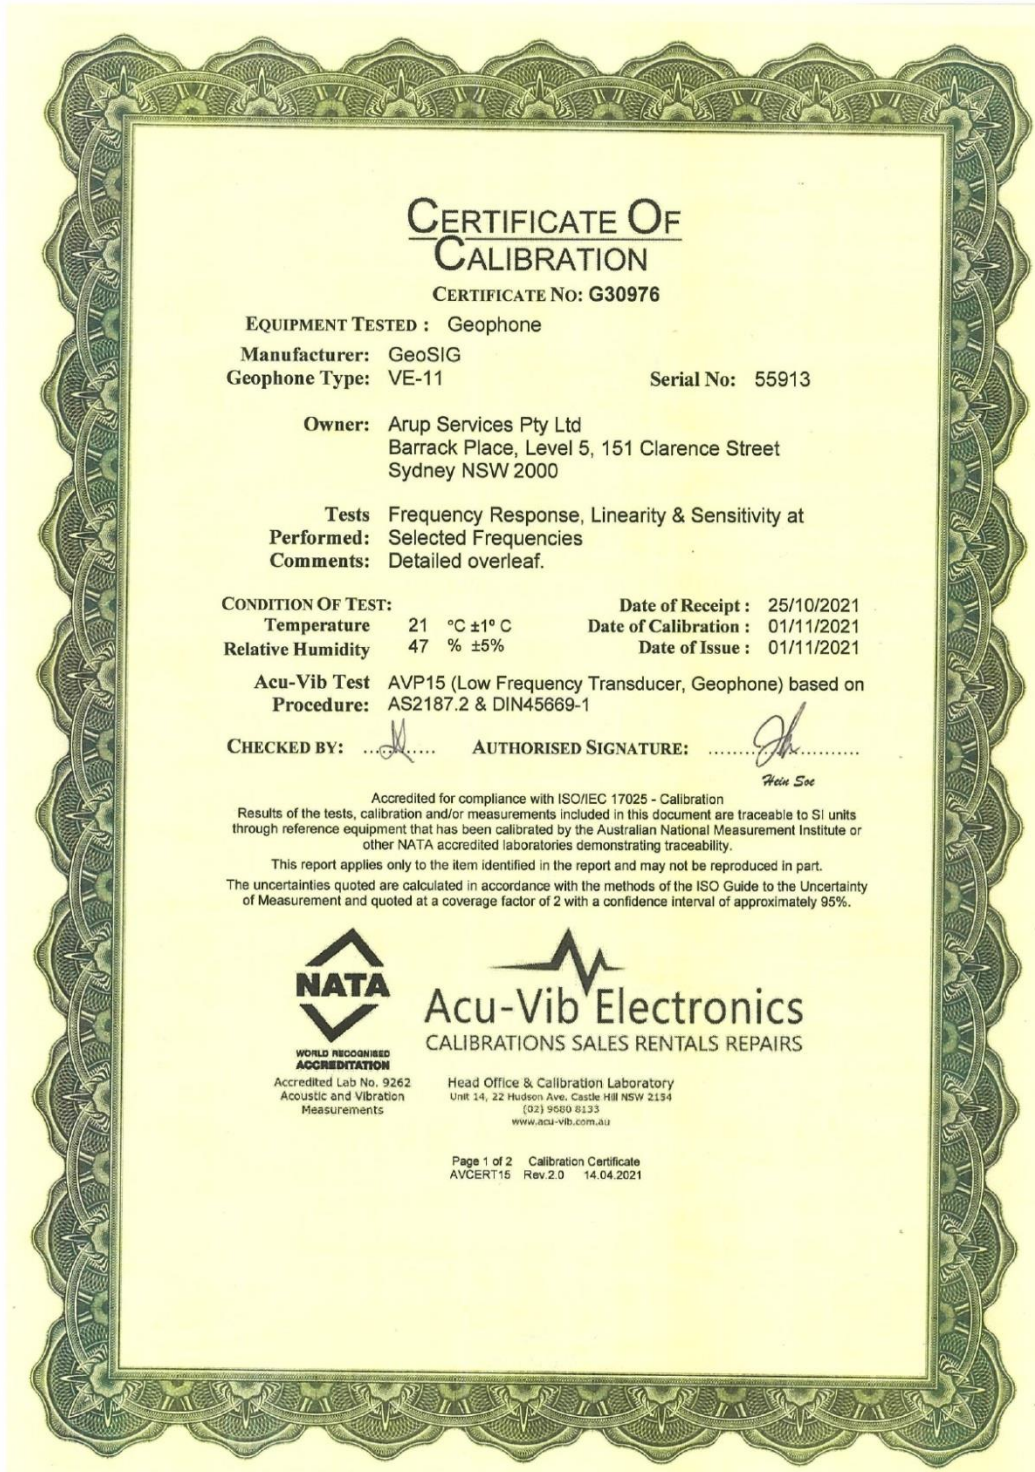

Frequency response and linearity characteristics for
GeoSIG Velocity Geophone **VE-11** Serial No. **55913**
Constant velocity of 10 mm/sec Peak applied for response
(Except at 200.0 Hz where applied level limited to 1.0 mm/s peak)
For amplitude linearity applied level varied at 15.92 Hz

12VDC Power Supply

Geophone Orientation.: Vertical

Frequency		Velocity mm/sec Peak	Indicated Sensitivity mV/mms ⁻¹ Vertical Sensitivity	Expanded uncertainty U ₉₅ %
Hz	Radians/sec			
3.00	18.85	10.0	106.24	1.00%
4.00	25.13	10.0	105.59	0.90%
6.00	37.70	10.0	100.69	0.90%
10.00	62.83	10.0	94.25	0.90%
15.00	94.25	10.0	91.31	0.90%
15.92	94.25	1.0	N/A	0.90%
15.92	94.25	5.0	85.93	0.90%
15.92	94.25	10.0	85.77	0.90%
15.92	94.25	50.0	85.76	0.90%
15.92	94.25	100	N/A	0.50%
30.00	188.50	10.0	89.27	0.50%
60.00	376.99	10.0	90.17	0.50%
120.00	753.98	10.0	100.67	0.50%
150.00	942.48	10.0	115.82	0.50%
Hz	Radians/sec	Velocity mm/sec Peak	Vertical Sensitivity	U ₉₅ %

Note1:

The laboratory has accreditation under ISO/IEC 17025 from NATA for calibration to ISO 16063-21 at frequencies from 0.5 Hz. Measurements at all frequencies and levels shown in the table above are made using reference equipment traceably calibrated to Australian National Standards.

Note2:

The uncertainties quoted are estimated at a confidence level of 95% and a coverage factor of k=2 applies unless otherwise stated.



Health Infrastructure

Children's Hospital Westmead

**Vibration Monitoring - CH - Mental
Health Utility - Wade Ward - February
2022**

CVM/ CH/202202

Issue 1 | 09/03/2022

This report takes into account the particular instructions and requirements of our client.

It is not intended for and should not be relied upon by any third party and no responsibility is undertaken to any third party.

Job number 271985

Arup Pty Ltd ABN 18 000 966 165

Arup Pty Ltd

Level 5

151 Clarence Street

Sydney NSW 2000

Australia

www.arup.com






Document Verification

Project title Children's Hospital Westmead
Document title Monthly Vibration Monitoring Report
Job number 271985
Document ref CVM/CH/202202
File reference -

Revision	Date	Filename
		Westmead Hospital – 103678 CH - Mental Health Utility - Wade Ward - Summary of Recent Vibration Measurements (01-02 to 28-02).docx

Issue 1 09/03/2022 **Description** Issue

	Prepared by	Checked by	Approved by
Name	PR	KF	KF
Signature			

Filename
Description

	Prepared by	Checked by	Approved by
Name			
Signature			

Filename
Description

	Prepared by	Checked by	Approved by
Name			
Signature			

Issue Document Verification with Document

Contents

Executive Summary.....	3
1. Introduction	4
2. Monitor Location	4
3. Recorded Data	5
Appendix A: Calibration Certificates.....	7

Executive Summary

This report summarises the vibration monitoring data recorded at CH - Mental Health Utility - Wade Ward, over one month – from 01/02/2022 to 28/02/2022. Graphs in this report show the recorded data in blue, and exceedance trigger levels in red.

RMSV Vibration Levels

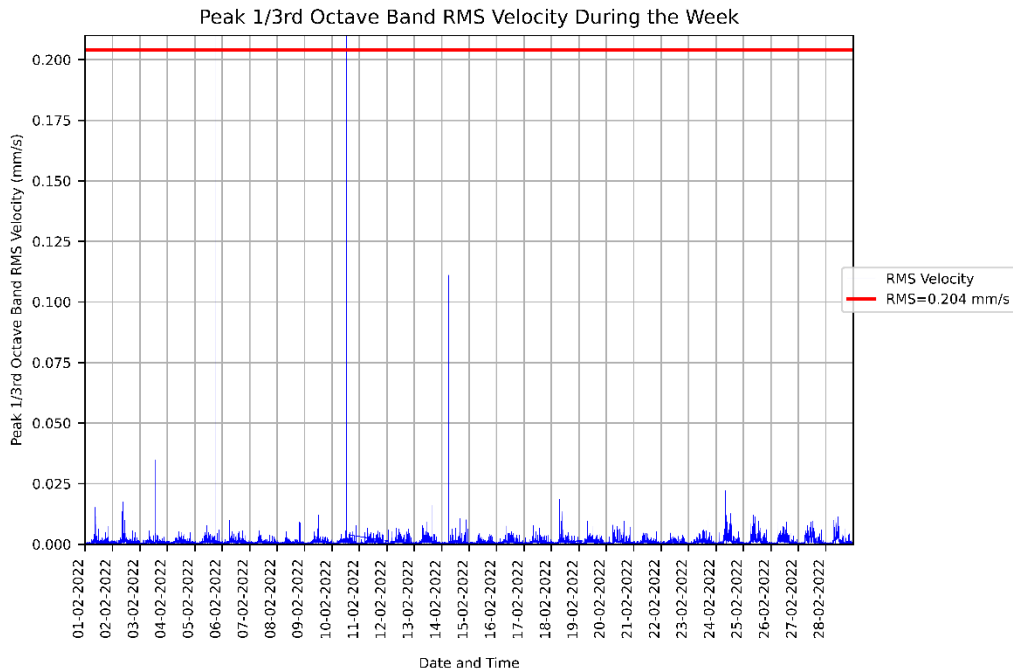


Figure 1: Measured RMSV vibration levels for 01/02/2022 to 28/02/2022 at the CH - Mental Health Utility - Wade Ward.

The table below summarises the number of Root-Mean-Square Velocity (RMSV) limit exceedances recorded during and outside of construction hours.

During Construction Hours	Outside of Construction Hours
1	1

1. Introduction

Arup has been commissioned by PricewaterhouseCoopers (PwC) on behalf of NSW Health Infrastructure to monitor vibration levels in facilities adjacent to the Paediatric Services Building and Multi-storey Car Park development sites to ensure facility operations are not excessively impacted by the construction works. This report summarises the vibration monitoring data recorded at CH - Mental Health Utility - Wade Ward during the period of the 01/02/2022 to 28/02/2022.

For the purposes of reporting, construction works are considered to be occurring at the following times:

Day	Construction Hours
Monday to Friday	7:00am to 6:00pm
Saturday	8:00am to 1:00pm
Sunday	No works
Public Holidays	No works

2. Monitor Location

The location of this monitor is shown below in Figure 2.

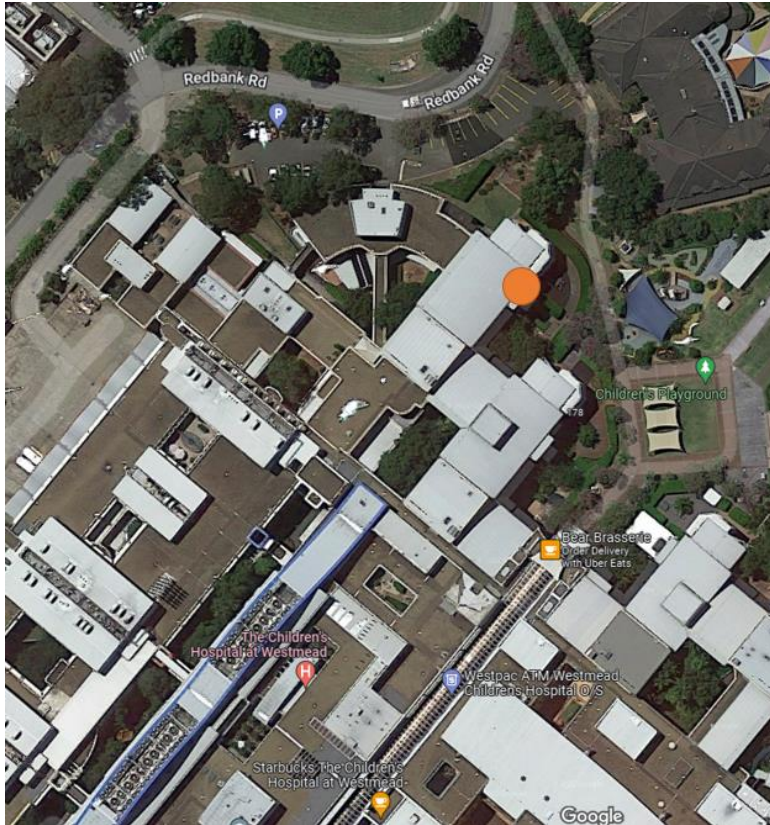


Figure 2: CH - Mental Health Utility - Wade Ward vibration monitor location shown in orange

Monitoring at this location utilises a GeoSIG GMSplus with a GeoSIG VE-11 geophone. The calibration certificate for the geophone is included in Appendix A.

3. Recorded Data

Figure 3 below shows the vibration levels (RMS velocity) recorded between 01/02/2022 and 28/02/2022. The recorded data is shown in blue, while the limit of 0.204mm/s (V_{RMS}) is shown in red.

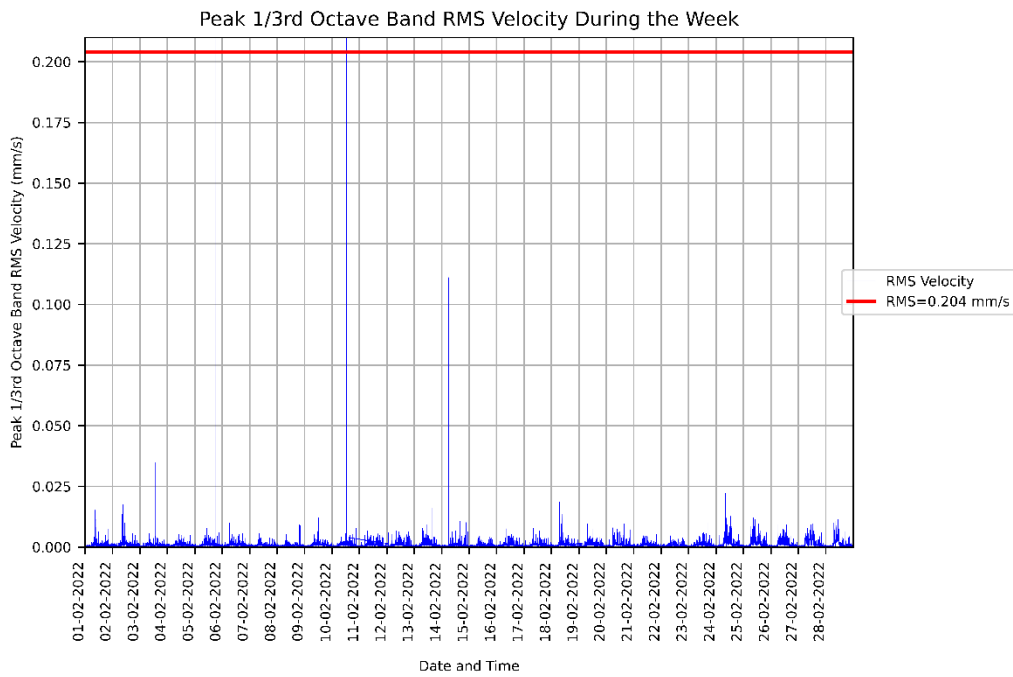


Figure 3: Measured RMSV vibration levels for 01/02/2022 to 28/02/2022 at the CH - Mental Health Utility - Wade Ward.

The table below summarises the number of RMS Velocity limit exceedances recorded during and outside of construction hours.

During Construction Hours	Outside of Construction Hours
1	1

Appendix A: Calibration Certificates

Test Record GMSplus

Test Record	1	Job	31057
S/N	103677	Test Procedure	GS_GMSplus_TestProcedure_V01

Customer	AU_ARUP_Riddet	Date	01.02.2018
		Tested by	Ross Baradoy

Model	GMSplus	103677	Option 1		
Type	3Ch		Option 2		
Description	Recorder		Option 3		
Main board	GS_IA18_S-MN.V06.H2	160281	Option 4		
Conn. board	GS_IA18_S-MN.V06.H2	160305	Option 5		
Input range	± 10 V DIFF		Option 6		
Sensor 1	VE-11	56865	Ext. Option 1	GXX-3GUE	17738
Sensor 2	0		Ext. Option 2		
Power	15 VDC		Ext. Option 3		
Armdas/Predas	21.12.16		MAC	8C:8E:76:00:C2:01	
Linux	gms-linux-firmware-r121_20170321.gsfw		DSP	51.03.05	
			RTC	80.02.03	

Remarks:

1. Test Equipment

1.1. Test equipment is as per list and ready	<input checked="" type="checkbox"/> Ok
--	--

2. Visual Check

2.1. No defects found during visual check	<input checked="" type="checkbox"/> Ok
---	--

3. Configuration

3.1. Description	GMSplus GeoSIG Ltd
3.2. Memory	8 GB
3.3. Station	GSGMS
3.4. Location	Australia
3.5. Sampling rate	200 SPS
3.6. Units	mm/s
3.7. LSB value	0.0000132500000mm/s /count
3.8. Pre event	5 s
3.9. Post event	10 s
3.10. Trigger level	2 and 3 mm/s
3.11. Alarms Trigger level	n/a

4. Sensor input test

4.1. AC input test	<input checked="" type="checkbox"/> Ok
4.2. DC input test	<input checked="" type="checkbox"/> Ok
4.3. Noise test	<input checked="" type="checkbox"/> Ok

5. Real sensor test

5.1. Test pulse	<input checked="" type="checkbox"/> Ok	<input type="checkbox"/> n/a
5.2. Event X-Y-Z	<input checked="" type="checkbox"/> Ok	<input type="checkbox"/> n/a
5.3. Tilt	<input checked="" type="checkbox"/> Ok	<input type="checkbox"/> n/a
5.4. Over range	<input checked="" type="checkbox"/> Ok	<input type="checkbox"/> n/a

6. Options testing

6.1. GMS-Wi-Fi	<input type="checkbox"/> Ok	<input checked="" type="checkbox"/> n/a
6.2. GMS-GPS	<input type="checkbox"/> Ok	<input checked="" type="checkbox"/> n/a
6.3. GXX-3GUM	<input checked="" type="checkbox"/> Ok	<input type="checkbox"/> n/a
6.4. ALC, Config:	<input type="checkbox"/> Ok	<input checked="" type="checkbox"/> n/a
6.5. GMS-Interconnection	<input type="checkbox"/> Ok	<input checked="" type="checkbox"/> n/a
6.6. Serial modem	<input type="checkbox"/> Ok	<input checked="" type="checkbox"/> n/a
6.7. Ethernet modem	<input type="checkbox"/> Ok	<input checked="" type="checkbox"/> n/a
6.8. Sensor junction box	<input type="checkbox"/> Ok	<input checked="" type="checkbox"/> n/a

7. Physical inspection

7.1. Housing	<input checked="" type="checkbox"/> Ok
7.2. Fixation and screws	<input checked="" type="checkbox"/> Ok
7.3. Cables and connectors	<input checked="" type="checkbox"/> Ok
7.4. Labels	<input checked="" type="checkbox"/> Ok
7.5. Cleanness	<input checked="" type="checkbox"/> Ok


8. Configuration backup

8.1. Instrument configuration (*.xml)	<input checked="" type="checkbox"/> Ok
8.2. Software configuration (*.gsc)	<input checked="" type="checkbox"/> Ok
8.3. Test files archived	<input checked="" type="checkbox"/> Ok

Final Acceptance

All tests were executed according to the test procedure and all results were checked and are according to the specifications.

Tested by Ross Baradoy  on 26.02.2018

Approved by Tobias Liesching  on 02.03.2018